



| WindMe MVS





 [linkedin.com/company/mycond-polska](https://www.linkedin.com/company/mycond-polska)

 facebook.com/mycondpolska

 [@mycondpolska](https://www.tiktok.com/@mycondpolska)

01 WindMe MVS Air Handling Units

1.1.	General specification	6
1.2.	Technical specification.....	8
1.2.1.	MVS 021-120 - Recuperator (hex & premium plus).....	12
1.2.2.	MVS 150-650 - Recuperator (premium plus).....	14
1.2.3.	MVS 021-120 - Regenerator (rotary heat wheel).....	16
1.2.4.	MVS 150-650- Regenerator (rotary heat wheel)	18
1.2.5.	MVS 21-120 - Supply & Exhaust.....	20
1.2.6.	MVS 150-650 - Supply & Exhaust.....	22
1.2.6.	Additional configuration functions - MVS 021-650 - recuperator (hex & premium plus), regenerator (rotary heat wheel), supply & exhaust.....	24
1.3.	Components	26
1.4.	Controls	34
1.4.1.	Description.....	34
1.4.2.	Control elements	38

02 Coding, symbols & markings

2.0.	Coding, symbols & markings	42
------	----------------------------------	----

03 Psychrometric chart (Mollier)


3.0.	Psychrometric chart (Mollier).....	46
------	------------------------------------	----



01

WindMe MVS

WindMe MVS

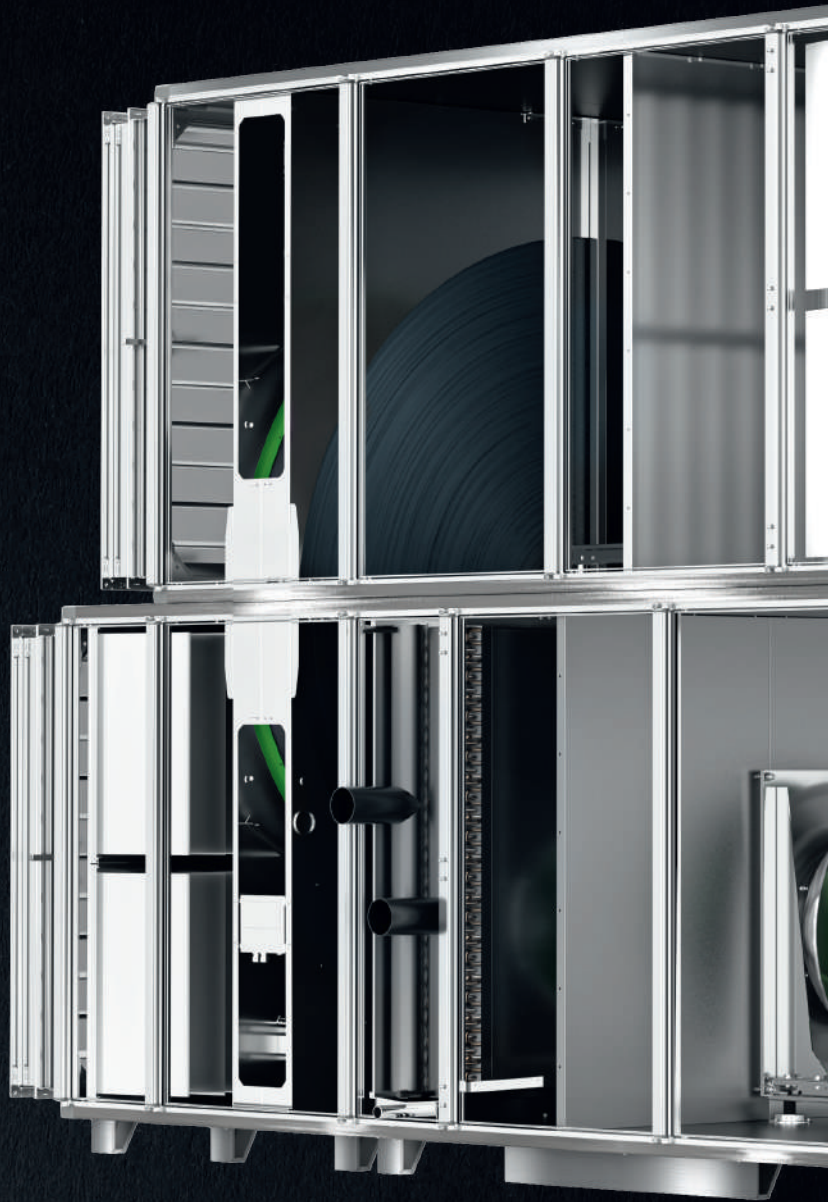

DURABLE
AND TIGHT
STRUCTURE



RELIABLE
COMPONENTS



Airflow

from **1 100** m³/h
from **100 000** m³/h



Up to **92%**
of energy recovery
efficiency



14
sizes




SMART
CONTROLS




USER
SAFETY

STRUCTURE



STEEL SKIN COATED
WITH ALUZINC AZ 150

CORROSION RESISTANCE

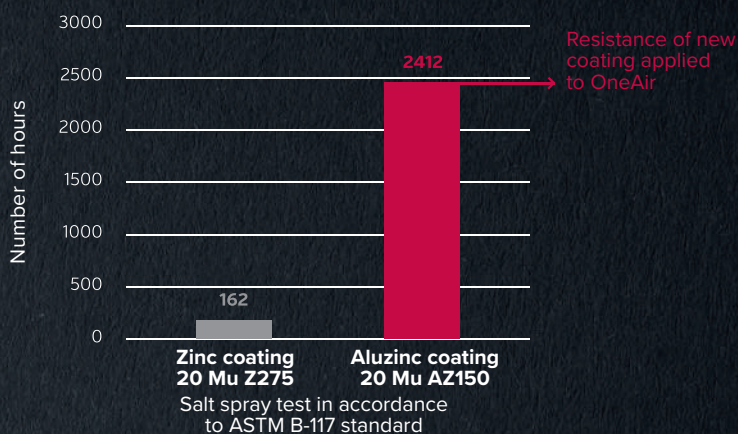

CASING SKIN

- Rigid, durable structure of the casing.
- Low absorption of heat radiation and UV.
- High resistance to weather conditions.




FAN SECTION CAGE

- Improved longitudinal rigidity of the structure.
- Facilitated sections joining.



PROFIL V

MVS 021-180

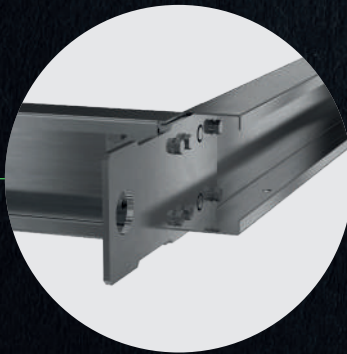

PROFIL C

MVS 230-650

STEEL BASE FRAME
AS **STANDARD** FOR ANY TYPE
OF UNITS

**ALUMINUM
POSTS**
OF SPECIAL
CONSTRUCTION
IN EACH AHU
TYPE

FOUNDATION

- Transport facilitation.
- High resistance of the frame to deflection.

STRUCTURAL POSTS

- Broken thermal bridges as standard.
- High resistance to weather conditions and UV radiation.

TIGHTNESS





CANOPY

- The canopy is made of 0,5 mm steel sheet, double side coated with 185 um of zinc (DX51D AZ185).
- Canopy is assembled of modules equipped with self-latching grooves securing perfect tightness of the joints. Modular structure of the canopy ensures its easy and safe assembly.




ERGONOMIC INSPECTION PANEL LOCK


- Highly aesthetic and ergonomic handles securing perfect tightness of inspection panels.

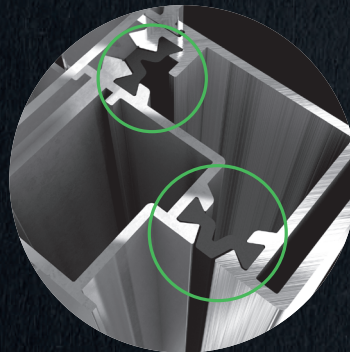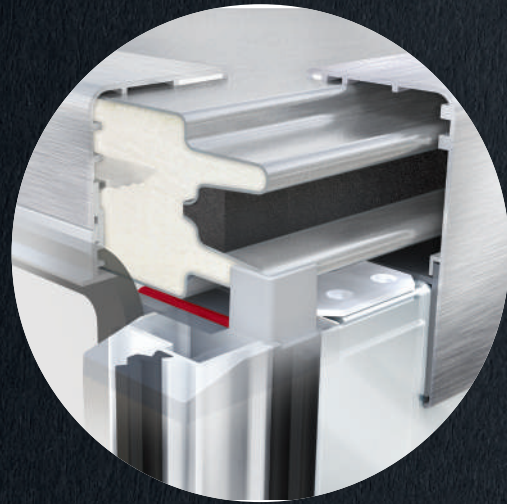

THERMAL BREAK

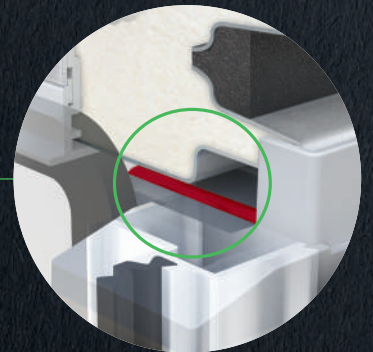

LABIRYNTH
TIGHTENING

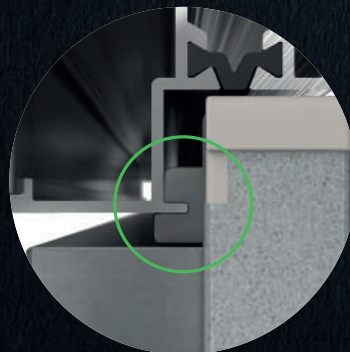

ADDITIONAL
POST SEALING



ADDITIONAL
SEALING BLADE

ALUMINUM STRUCTURAL POSTS WITH ADDITIONAL SEALING BLADE AND THERMAL BREAK



- Broken thermal bridge as standard – eliminates humidity condensation on units structural elements.
- Blade along the inspection window ensures labyrinth tightening between panel and AHU body – currently the most effective solution on the market, mainly applied to laboratory equipment.
- Symmetrical groove in the vertical post's mounting feet secures its 100% tightness with the AHU casing structure.

MVS 021-120 – RECUPERATOR (HEX & PREMIUM PLUS)

Nominal parameters		Recommended airflow range																				
Unit size		MVS021			MVS030			MVS040			MVS055			MVS075			MVS100			MVS120		
18 000	[m³/h]																					
12 000																						
6 000																						
0																						
		⊕	⊗	⊖	⊕	⊗	⊖	⊕	⊗	⊖	⊕	⊗	⊖	⊕	⊗	⊖	⊕	⊗	⊖	⊕	⊗	⊖
Min airflow		806	806	806	1180	1180	1180	1958	1958	1958	2 878	2 878	2 878	3 805	3 805	3 805	4 863	4 863	4 863	5 815	5 815	5 815
Max airflow		2 730	2 184	2 163	3 900	3 120	3 090	5 200	4 160	4 120	7 150	5 720	5 665	9 750	7 800	7 725	13 000	10 400	10 300	15 600	12 480	12 360
H _{td}	90			90			90			90			90			90			90			
H _{tu}	-			-			-			-			-			-			-			
H	538			670			670			805			925			1 025			1 062			
W	961			961			1 168			1 339			1 480			1 660			1 891			
H _i	368			500			500			635			755			855			892			
W _i	881			881			1 088			1 259			1 400			1 580			1 811			
H ₂	986			1 250			1 250			1 520			1 760			1 960			2 034			
I	40			40			40			40			40			40			40			

Length of selected configurations								
Selected configurations	Dimension							
								
	L2	2 928	3 294	3 294	3 294	3 294	4 026	4 026
	L1	2 562	2 928	2 928	2 928	2 928	4 026	4 026
	K	366	366	366	366	0	0	0
	Lt	2 928	3 294	3 294	3 294	3 294	4 026	4 026
	L2	2 928	3 294	3 294	3 294	3 294	4 026	4 026
	L1	2 562	2 928	2 928	2 928	3 294	4 026	4 026
	K	366	366	366	366	0	0	0
	Lt	2 928	3 294	3 294	3 294	3 294	4 026	4 026
	L2	2 928	3 294	3 294	3 294	3 294	4 026	4 026
	L1	2 928	3 294	3 294	3 294	3 660	4 392	4 392
	K	0	0	0	0	0	0	0
	Lt	2 928	3 294	3 294	3 294	3 660	4 392	4 392
	L2	2 928	3 294	3 294	3 294	3 660	4 392	4 392
	L1	2 928	3 294	3 294	3 294	3 660	4 026	4 026
	K	0	0	0	0	0	0	0
	Lt	2 928	3 294	3 294	3 294	3 660	4 758	4 758
	L2	2 928	3 294	3 294	3 294	3 294	4 026	4 026
	L1	3 294	3 660	3 660	3 660	4 026	4 758	4 758
	K	0	0	0	0	0	0	0
	Lt	3 294	3 660	3 660	3 660	4 026	4 758	4 758
	L2	2 928	3 294	3 294	3 294	3 294	4 026	4 026
	L1	3 294	3 660	3 660	3 660	4 026	4 758	4 758
	K	0	0	0	0	0	0	0
	Lt	3 294	3 660	3 660	3 660	4 026	4 758	4 758

DIMENSIONS – MVS 021-120 – RECUPERATOR (HEX & PREMIUM PLUS)

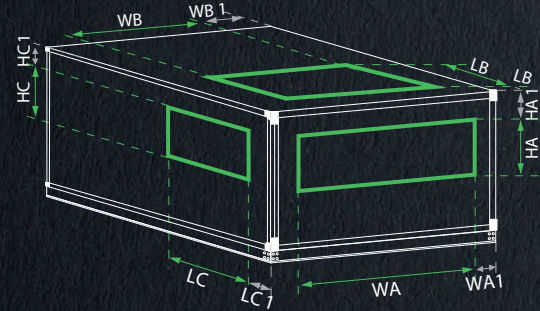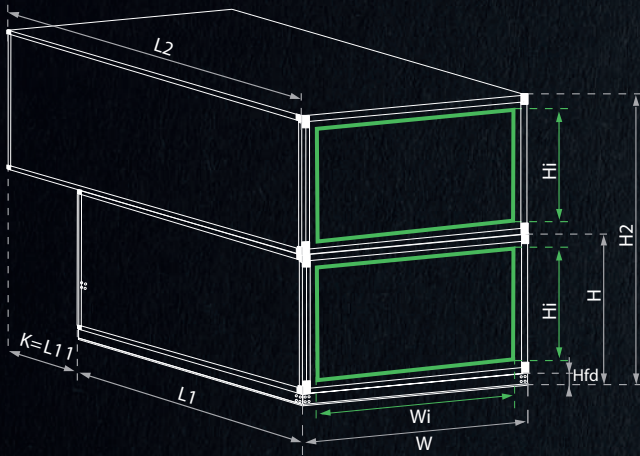

Full-face horizontal outlet
END (FF)



Size	WA	HA	WA1	HA1
MVS021	821	313	70	67,5
MVS030	821	440	70	70
MVS040	1 028	440	70	70
MVS055	1 199	575	70	70
MVS075	1 340	695	70	70
MVS100	1 520	795	70	70
MVS120	1 751	832	70	70

Small horizontal inlet-outlet
END (FS)



Size	WA	HA	WA1	HA1
MVS021	500	220	228	112
MVS030	500	220	228	178
MVS040	660	250	252	163
MVS055	821	440	257	135
MVS075	1 028	440	224	195
MVS100	1 199	575	228	200
MVS120	1 199	575	344	196

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS021	500	220	228	200
MVS030	500	220	228	200
MVS040	660	250	252	200
MVS055	821	440	257	200
MVS075	1 028	440	224	200
MVS100	1 199	575	228	125
MVS120	1 199	575	344	125

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS021	660	250	152	212
MVS030	613	380	173	127
MVS040	821	440	175	127
MVS055	1 028	440	157	212
MVS075	1 199	575	142	212
MVS100	1 340	695	162	212
MVS120	1 520	795	187	127

Side inlet-outlet
END (BS)



Size	HC	LC	HC1	LC1
MVS021	213	380	115	165
MVS030	313	380	131	165
MVS040	313	380	131	165
MVS055	413	380	149	165
MVS075	413	380	209	165
MVS100	613	380	159	165
MVS120	613	380	177	165

Side inlet-outlet
END (BS)





Size	HC	LC	HC1	LC1
MVS021	213	380	114	202
MVS030	313	380	180	202
MVS040	313	380	165	202
MVS055	413	380	137	202
MVS075	413	380	197	202
MVS100	613	380	158	127
MVS120	613	380	198	127

MVS 150-650 - RECUPERATOR (PREMIUM PLUS)

Nominal parameters		Recommended airflow range																							
Unit size		MVS150			MVS180			MVS230			MVS300			MVS400			MVS500			MVS650					
90 000 60 000 30 000 0	[m³/h]																								
Min airflow		7 167	7 167	7 167	8 640	8 640	8 640	10 398	10 398	10 398	13 491	13 491	13 491	18 704	18 704	18 704	21 817	21 817	21 817	28 725	28 725	28 725			
Max airflow		19 500	15 600	15 450	23 400	18 720	18 540	29 900	23 920	23 690	39 000	31 200	30 900	52 000	41 600	41 200	71 500	57 200	56 650	84 500	67 600	66 950			
H _{id}	[mm]	90			120			120			120			120			120			120					
H _{tu}		0			80			80			80			80			80			80					
H		1 163			1 397			1 397			1 696			1 929			1 929			2 406					
W		2 085			2 085			2 493			2 585			3 085			3 585			3 697					
H _i		993			1 197			1 197			1 496			1 729			1 729			2 206					
W _i		2 005			2 005			2 413			2 505			3 005			3 505			3 617					
H ₂		2 236			2 754			2 754			3 352			3 818			3 818			4 772					
I		40			40			40			40			40			40			40					

Length of selected configurations								
Selected configurations	Dimension							
		 						
 FPDV/FVPD_cd	L2	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	L1	4 026	4 026	4 026	5 124	5 124	5 124	5 490
	K	366	366	366	366	366	366	366
	Lt	4 392	4 392	4 392	5 490	5 490	5 490	5 856
 FPDMV/FVMPD_cd	L2	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	L1	4 026	4 026	4 026	5 124	5 124	5 124	5 490
	K	366	366	366	366	366	366	366
	Lt	4 392	4 392	4 392	5 490	5 490	5 490	5 856
 FPDHFV/FVPD_cd	L2	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	L1	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	K	0	0	0	0	0	0	0
	Lt	4 392	4 392	4 392	5 490	5 490	5 490	5 856
 FPDMHFV/FVMPD_cd	L2	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	L1	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	K	0	0	0	0	0	0	0
	Lt	4 392	4 392	4 392	5 490	5 490	5 490	5 856
 FPDHCV/FVPD_cd	L2	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	L1	4 758	4 758	4 758	5 856	5 856	5 856	6 222
	K	0	0	0	0	0	0	0
	Lt	4 758	4 758	4 758	5 856	5 856	5 856	6 222
 FPDMHCV/FVMPD_cd	L2	4 392	4 392	4 392	5 490	5 490	5 490	5 856
	L1	4 758	4 758	4 758	5 856	5 856	5 856	6 222
	K	0	0	0	0	0	0	0
	Lt	4 758	4 758	4 758	5 856	5 856	5 856	6 222

DIMENSIONS - MVS 150-650 - RECUPERATOR (PREMIUM PLUS)

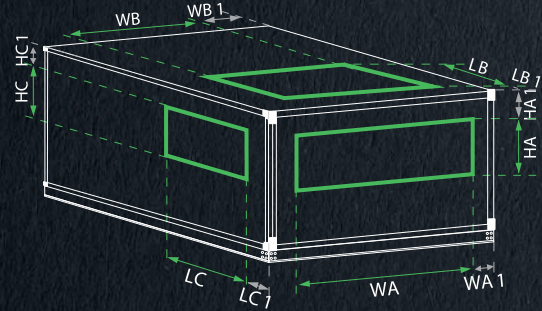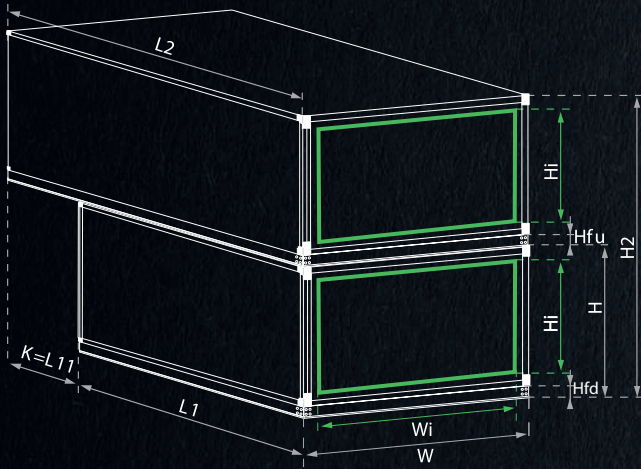

Full-face horizontal outlet
END (FF)



Size	WA	HA	WA1	HA1
MVS150	1 945	933	70	70
MVS180	1 945	1 137	70	70
MVS230	2 353	1 137	70	70
MVS300	2 445	1 436	70	70
MVS400	2 945	1 669	70	70
MVS500	3 445	1 669	70	70
MVS650	3 557	2 146	70	70

Small horizontal inlet-outlet
END (FS)



Size	WA	HA	WA1	HA1
MVS150	1520	795	280	137
MVS180	1520	713	280	239
MVS230	1945	813	272	200
MVS300	1945	813	318	319
MVS400	2650	813	215	436
MVS500	3150	813	215	436
MVS650	3250	813	220	674

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS150	1520	795	280	200
MVS180	1520	713	280	239
MVS230	1945	813	272	151
MVS300	1945	813	318	151
MVS400	2650	813	215	151
MVS500	3150	813	215	151
MVS650	3250	813	220	151

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS150	1520	795	280	127
MVS180	1520	713	293	127
MVS230	1945	813	284	127
MVS300	1945	813	330	127
MVS400	2650	813	228	127
MVS500	3150	813	228	212
MVS650	3250	813	234	212

Side inlet-outlet
END (BS)



Size	HC	LC	HC1	LC1
MVS150	713	740	178	165
MVS180	913	740	180	165
MVS230	913	740	180	165
MVS300	1 213	740	179	165
MVS400	1 513	740	146	165
MVS500	1 513	740	146	165
MVS650	1 913	740	184	165

Side inlet-outlet
END (BS)



Size	HC	LC	HC1	LC1
MVS150	713	740	139	202
MVS180	913	740	241	202
MVS230	913	740	142	127
MVS300	1 213	740	321	127
MVS400	1 513	740	438	127
MVS500	1 513	740	438	127
MVS650	1 913	740	676	127



MVS 021-120 - ROTARY HEAT WHEEL

Nominal parameters		Recommended airflow range																							
Unit size		MVS021			MVS030			MVS040			MVS055			MVS075			MVS100			MVS120					
18 000	[m³/h]																								
12 000																									
6 000																									
0																									
		+	0	-	+	0	-	+	0	-	+	0	-	+	0	-	+	0	-	+	0	-	+	0	-
Min airflow		806	806	806	1180	1180	1180	1958	1958	1958	2878	2878	2878	3805	3805	3805	4863	4863	4863	5815	5815	5815			
Max airflow		2730	2415	2163	3900	3450	3090	5200	4600	4120	7150	6325	5665	9750	8625	7725	13000	11500	10300	15600	13800	12360			
H _{id}	[mm]	90			90			90			90			90			90			90					
H _{tu}		0			0			0			0			0			0			0					
H		538			670			670			805			925			1025			1062					
W		961			961			1168			1339			1480			1660			1891					
H _i		368			500			500			635			755			855			892					
W _i		881			881			1088			1259			1400			1580			1811					
H ₂		986			1250			1250			1520			1760			1960			2034					
I		40			40			40			40			40			40			40					

Selected configurations	Dimension	Length of selected configurations							
 FRV/FRV_cd	L2	[mm]	1830	1830	1830	2196	2196	2562	2562
	L1		1830	1830	1830	2196	2196	2562	2562
	K		366	366	366	732	732	1098	1098
	Lt		1830	1830	1830	2196	2196	2562	2562
 FRMV/FVMR_cd	L2		2562	2562	2562	2928	2928	3294	3294
	L1		2562	2562	2562	2928	2928	3294	3294
	K		366	366	366	366	366	366	366
	Lt		2562	2562	2562	2928	2928	3294	3294
 FRHV/FRV_cd	L2		1830	1830	1830	2196	2196	2562	2562
	L1		2196	2196	2196	2562	2562	2928	2928
	K		366	366	366	732	732	1098	1098
	Lt		2196	2196	2196	2562	2562	2928	2928
 FRMHV/FVMR_cd	L2		2562	2562	2562	2928	2928	3294	3294
	L1		2928	2928	2928	3294	3294	3660	3660
	K		0	0	0	0	0	0	0
	Lt		2928	2928	2928	3294	3294	3660	3660
 FRCV/FRV_cd	L2		1830	1830	1830	2196	2196	2562	2562
	L1		2196	2196	2196	2562	2562	2928	2928
	K		366	366	366	732	732	1098	1098
	Lt		2196	2196	2196	2562	2562	2928	2928
 FRMCV/FVMR_cd	L2		2562	2562	2562	2928	2928	3294	3294
	L1		2928	2928	2928	3294	3294	3660	3660
	K		0	0	0	0	0	0	0
	Lt		2928	2928	2928	3294	3294	3660	3660

DIMENSIONS - MVS 021-120

- ROTARY HEAT WHEEL

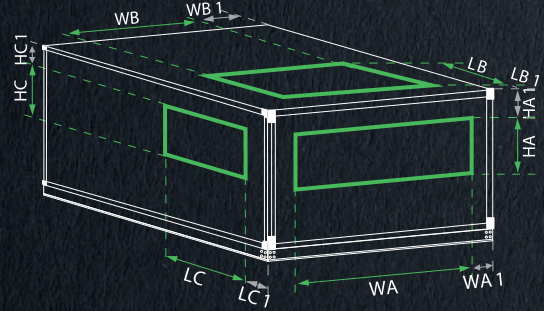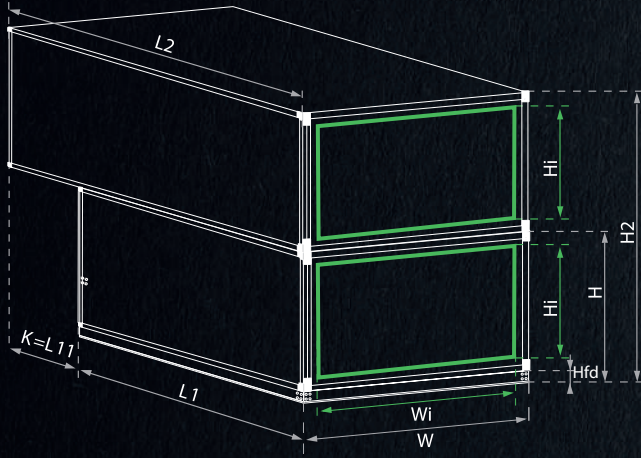

Full-face horizontal outlet
END (FF)



Size	WA	HA	WA1	HA1
MVS021	821	313	70	67,5
MVS030	821	440	70	70
MVS040	1 028	440	70	70
MVS055	1 199	575	70	70
MVS075	1 340	695	70	70
MVS100	1 520	795	70	70
MVS120	1 751	832	70	70

Small horizontal inlet-outlet
END (FS)



Size	WA	HA	WA1	HA1
MVS021	500	220	228	112
MVS030	500	220	228	178
MVS040	660	250	252	163
MVS055	821	440	257	135
MVS075	1 028	440	224	195
MVS100	1 199	575	228	200
MVS120	1 199	575	344	196

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS021	500	220	228	200
MVS030	500	220	228	200
MVS040	660	250	252	200
MVS055	821	440	257	200
MVS075	1 028	440	224	200
MVS100	1 199	575	228	125
MVS120	1 199	575	344	125

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS021	660	250	152	212
MVS030	613	380	173	127
MVS040	821	440	175	127
MVS055	1 028	440	157	212
MVS075	1 199	575	142	212
MVS100	1 340	695	162	212
MVS120	1 520	795	187	127

Side inlet-outlet
END (BS)



Size	HC	LC	HC1	LC1
MVS021	213	380	115	165
MVS030	313	380	131	165
MVS040	313	380	131	165
MVS055	413	380	149	165
MVS075	413	380	209	165
MVS100	613	380	159	165
MVS120	613	380	177	165

Side inlet-outlet
END (BS)





Size	HC	LC	HC1	LC1
MVS021	213	380	114	202
MVS030	313	380	180	202
MVS040	313	380	165	202
MVS055	413	380	137	202
MVS075	413	380	197	202
MVS100	613	380	158	127
MVS120	613	380	198	127

MVS 150-650- ROTARY HEAT WHEEL

Nominal parameters		Recommended airflow range																							
Unit size		MVS150			MVS180			MVS230			MVS300			MVS400			MVS500			MVS650					
90 000 60 000 30 000 0	[m³/h]																								
		⊕	⊖	⊖	⊕	⊖	⊖	⊕	⊖	⊖	⊕	⊖	⊖	⊕	⊖	⊖	⊕	⊖	⊖	⊕	⊖	⊖			
		Min airflow			7 167	7 167	7 167	8 640	8 640	8 640	10 398	10 398	10 398	13 491	13 491	13 491	18 704	18 704	18 704	21 817	21 817	21 817	28 725	28 725	28 725
		Max airflow			19 500	16 350	15 450	23 400	19 620	18 540	29 900	25 070	23 690	39 000	32 700	30 900	52 000	43 600	41 200	71 500	59 950	56 650	84 500	70 850	66 950
		[mm]	H _{id}			120			120			120			120			120			120				
			H _{tu}			80			80			80			80			80			80				
			H			1 397			1 397			1 696			1 929			1 929			2 406				
			W			2 085			2 493			2 585			3 085			3 585			3 697				
			H _i			1 197			1 197			1 496			1 729			1 729			2 206				
			W _i			2 005			2 413			2 505			3 005			3 505			3 617				
			H ₂			2 754			2 754			3 352			3 818			3 818			4 772				
		I			40			40			40			40			40			40					

Selected configurations	Dimension	Length of selected configurations							
 FRV/FRV_cd	L2	[mm]	2 562	2 562	2 562	2 928	2 928	2 928	2 928
	L1		2 562	2 562	2 562	2 928	2 928	2 928	2 928
	K		1 098	1 098	1 098	1 464	1 464	1 464	1 464
	Lt		2 562	2 562	2 562	2 928	2 928	2 928	2 928
 FRMV/FVMR_cd	L2		3 660	3 660	3 660	4 026	4 026	4 026	4 026
	L1		3 660	3 660	3 660	4 026	4 026	4 026	4 026
	K		0	0	0	0	0	0	0
	Lt		3 660	3 660	3 660	4 026	4 026	4 026	4 026
 FRHV/FRV_cd	L2		2 562	2 562	2 562	2 928	2 928	2 928	2 928
	L1		2 928	2 928	2 928	3 294	3 294	3 294	3 294
	K		1 098	1 098	1 098	1 464	1 464	1 464	1 464
	Lt		2 928	2 928	2 928	3 294	3 294	3 294	3 294
 FRMHV/FVMR_cd	L2		3 660	3 660	3 660	4 026	4 026	4 026	4 026
	L1		4 026	4 026	4 026	4 392	4 392	4 392	4 392
	K		0	0	0	0	0	0	0
	Lt		4 026	4 026	4 026	4 392	4 392	4 392	4 392
 FRMHV/FVMR_cd	L2		2 562	2 562	2 562	2 928	2 928	2 928	2 928
	L1		2 928	2 928	2 928	3 294	3 294	3 294	3 294
	K		1 098	1 098	1 098	1 464	1 464	1 464	1 464
	Lt		2 928	2 928	2 928	3 294	3 294	3 294	3 294
 FRMCV/FVMR_cd	L2		3 660	3 660	3 660	4 026	4 026	4 026	4 026
	L1		4 026	4 026	4 026	4 392	4 392	4 392	4 392
	K		0	0	0	0	0	0	0
	Lt		4 026	4 026	4 026	4 392	4 392	4 392	4 392

DIMENSIONS - MVS 150-650 - ROTARY HEAT WHEEL

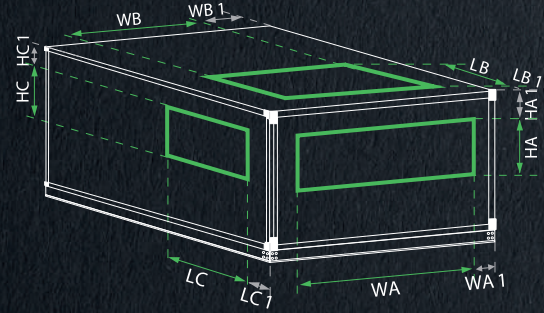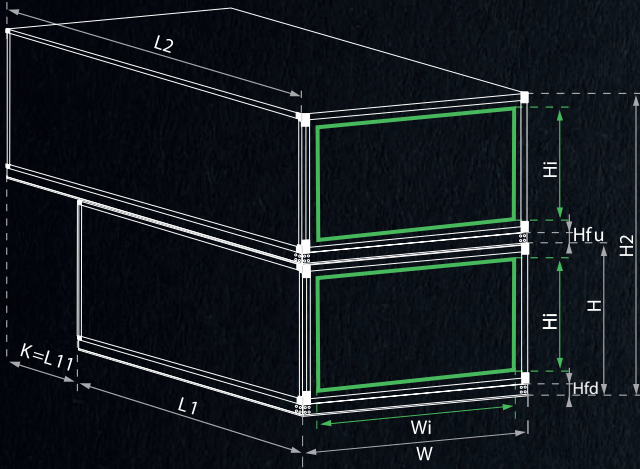

Full-face horizontal outlet
END (FF)



Size	WA	HA	WA1	HA1
MVS150	1 945	933	70	70
MVS180	1 945	1 137	70	70
MVS230	2 353	1 137	70	70
MVS300	2 445	1 436	70	70
MVS400	2 945	1 669	70	70
MVS500	3 445	1 669	70	70
MVS650	3 557	2 146	70	70

Small horizontal inlet-outlet
END (FS)



Size	WA	HA	WA1	HA1
MVS150	1520	795	280	137
MVS180	1520	713	280	239
MVS230	1945	813	272	200
MVS300	1945	813	318	319
MVS400	2650	813	215	436
MVS500	3150	813	215	436
MVS650	3250	813	220	674

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS150	1520	795	280	200
MVS180	1520	713	280	239
MVS230	1945	813	272	151
MVS300	1945	813	318	151
MVS400	2650	813	215	151
MVS500	3150	813	215	151
MVS650	3250	813	220	151

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS150	1520	795	280	127
MVS180	1520	713	293	127
MVS230	1945	813	284	127
MVS300	1945	813	330	127
MVS400	2650	813	228	127
MVS500	3150	813	228	212
MVS650	3250	813	234	212

Side inlet-outlet
END (BS)



Size	HC	LC	HC1	LC1
MVS150	713	740	178	165
MVS180	913	740	180	165
MVS230	913	740	180	165
MVS300	1 213	740	179	165
MVS400	1 513	740	146	165
MVS500	1 513	740	146	165
MVS650	1 913	740	184	165

Side inlet-outlet
END (BS)





Size	HC	LC	HC1	LC1
MVS150	713	740	139	202
MVS180	913	740	241	202
MVS230	913	740	142	127
MVS300	1 213	740	321	127
MVS400	1 513	740	438	127
MVS500	1 513	740	438	127
MVS650	1 913	740	676	127

MVS 021-120 - SUPPLY & EXHAUST

Nominal parameters		Recommended airflow range																												
Unit size		MVS021				MVS030				MVS040				MVS055				MVS075				MVS100				MVS120				
20 000 15 000 10 000 5 000 0	[m³/h]																													
Min airflow		806	806	806	806	1180	1180	1167	1167	1958	1958	1958	1958	2 878	2 878	2 878	2 878	3 805	3 805	3 805	3 805	4 863	4 863	4 863	4 863	5 815	5 815	5 815	5 815	
Max airflow		2 163	2 730	3 570	3 780	3 090	3 900	5 100	5 400	4 120	5 200	6 800	7 200	5 665	7 150	9 350	9 900	7 725	9 750	12 750	13 500	10 300	13 000	17 000	18 000	12 360	15 600	20 400	21 600	
H _{td}		90				90				90				90				90				90				90				
H		538				670				670				805				925				1 025				1 062				
W		961				961				1 168				1 339				1 480				1 660				1 891				
H _i		368				500				500				635				755				855				892				
W _i		881				881				1 088				1 259				1 400				1 580				1 811				
I		40				40				40				40				40				40				40				

Selected configurations	Dimension	Length of selected configurations							
 V	Lt	[mm]	732	732	732	1 098	1 098	1 464	1 464
 FV	Lt		1 098	1 098	1 098	1 464	1 464	1 830	1 830
 FHV	Lt		1 464	1 464	1 464	1 830	1 830	2 196	2 196
 FCV	Lt		1 464	1 464	1 464	1 830	1 830	2 196	2 196
 FHCV	Lt		1 830	1 830	1 830	2 196	2 196	2 562	2 562
 FGHV	Lt		1 830	1 830	1 830	2 196	2 196	2 562	2 562
 FGV	Lt		1 464	1 464	1 464	1 830	1 830	2 196	2 196
 FGCVH	Lt		2 196	2 196	2 196	2 562	2 562	2 928	2 928

DIMENSIONS - MVS 0 21-120 - SUPPLY & EXHAUST

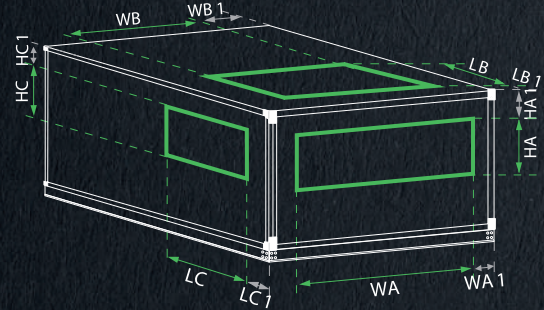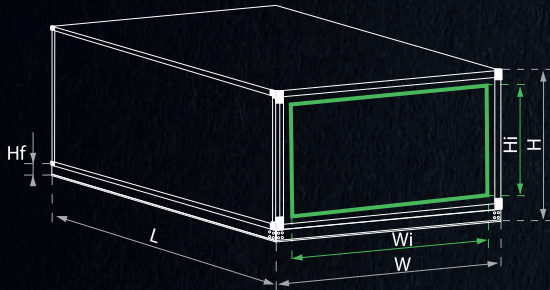

Full-face horizontal outlet
END (FF)



Size	WA	HA	WA1	HA1
MVS021	821	313	70	67,5
MVS030	821	440	70	70
MVS040	1 028	440	70	70
MVS055	1 199	575	70	70
MVS075	1 340	695	70	70
MVS100	1 520	795	70	70
MVS120	1 751	832	70	70

Small horizontal inlet-outlet
END (FS)



Size	WA	HA	WA1	HA1
MVS021	500	220	228	112
MVS030	500	220	228	178
MVS040	660	250	252	163
MVS055	821	440	257	135
MVS075	1 028	440	224	195
MVS100	1 199	575	228	200
MVS120	1 199	575	344	196

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS021	500	220	228	112
MVS030	500	220	228	178
MVS040	660	250	252	163
MVS055	821	440	257	135
MVS075	1 028	440	224	195
MVS100	1 199	575	228	200
MVS120	1 199	575	344	196

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS021	660	250	152	212
MVS030	613	380	173	127
MVS040	821	440	175	127
MVS055	1 028	440	157	212
MVS075	1 199	575	142	212
MVS100	1 340	695	162	212
MVS120	1 520	795	187	127

Side inlet-outlet
END (BS)




Size	HC	LC	HC1	LC1
MVS021	213	380	115	165
MVS030	313	380	131	165
MVS040	313	380	131	165
MVS055	413	380	149	165
MVS075	413	380	209	165
MVS100	613	380	159	165
MVS120	613	380	177	165

Side inlet-outlet
END (BS)





Size	HC	LC	HC1	LC1
MVS021	213	380	114	202
MVS030	313	380	180	202
MVS040	313	380	165	202
MVS055	413	380	137	202
MVS075	413	380	197	202
MVS100	613	380	158	127
MVS120	613	380	198	127

MVS 150-650 - SUPPLY & EXHAUST

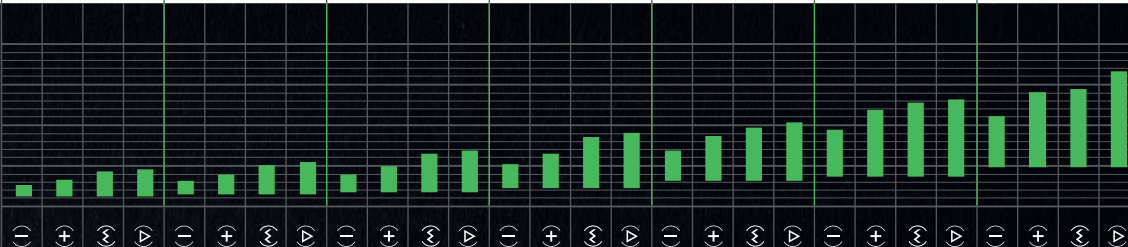Nominal parameters		Recommended airflow range																																																							
Unit size		MVS150				MVS180				MVS230				MVS300				MVS400				MVS500				MVS650																															
120 000 90 000 60 000 30 000 0	[m³/h]																																																								
																																																									
		<table><tr><td>7 167</td><td>7 167</td><td>7 167</td><td>7 167</td><td>8 640</td><td>8 640</td><td>8 640</td><td>8 640</td><td>10 398</td><td>10 398</td><td>10 398</td><td>10 398</td><td>13 491</td><td>13 491</td><td>13 491</td><td>13 491</td><td>18 704</td><td>18 704</td><td>18 704</td><td>18 704</td><td>21 817</td><td>21 817</td><td>21 817</td><td>21 817</td><td>28 725</td><td>28 725</td><td>28 725</td><td>28 725</td></tr></table>																												7 167	7 167	7 167	7 167	8 640	8 640	8 640	8 640	10 398	10 398	10 398	10 398	13 491	13 491	13 491	13 491	18 704	18 704	18 704	18 704	21 817	21 817	21 817	21 817	28 725	28 725	28 725	28 725
		7 167	7 167	7 167	7 167	8 640	8 640	8 640	8 640	10 398	10 398	10 398	10 398	13 491	13 491	13 491	13 491	18 704	18 704	18 704	18 704	21 817	21 817	21 817	21 817	28 725	28 725	28 725	28 725																												
		<table><tr><td>15 450</td><td>19 500</td><td>25 500</td><td>27 000</td><td>18 540</td><td>23 400</td><td>30 600</td><td>32 400</td><td>23 690</td><td>29 900</td><td>39 100</td><td>41 400</td><td>30 900</td><td>39 000</td><td>51 000</td><td>54 000</td><td>41 200</td><td>52 000</td><td>58 000</td><td>62 000</td><td>56 650</td><td>71 500</td><td>77 000</td><td>79 000</td><td>66 950</td><td>84 500</td><td>87 000</td><td>100 000</td></tr></table>																												15 450	19 500	25 500	27 000	18 540	23 400	30 600	32 400	23 690	29 900	39 100	41 400	30 900	39 000	51 000	54 000	41 200	52 000	58 000	62 000	56 650	71 500	77 000	79 000	66 950	84 500	87 000	100 000
15 450	19 500	25 500	27 000	18 540	23 400	30 600	32 400	23 690	29 900	39 100	41 400	30 900	39 000	51 000	54 000	41 200	52 000	58 000	62 000	56 650	71 500	77 000	79 000	66 950	84 500	87 000	100 000																														
Min airflow																																																									
Max airflow																																																									
H _{fd}		<table><tr><td colspan="4">90</td><td colspan="4">120</td><td colspan="4">120</td><td colspan="4">120</td><td colspan="4">120</td><td colspan="4">120</td><td colspan="4">120</td></tr></table>																												90				120				120				120				120				120				120			
90				120				120				120				120				120				120																																	
H _{fu}		<table><tr><td colspan="4">0</td><td colspan="4">80</td><td colspan="4">80</td><td colspan="4">80</td><td colspan="4">80</td><td colspan="4">80</td><td colspan="4">80</td></tr></table>																												0				80				80				80				80				80				80			
0				80				80				80				80				80				80																																	
H		<table><tr><td colspan="4">1 163</td><td colspan="4">1 397</td><td colspan="4">1 397</td><td colspan="4">1 696</td><td colspan="4">1 929</td><td colspan="4">1 929</td><td colspan="4">2 406</td></tr></table>																												1 163				1 397				1 397				1 696				1 929				1 929				2 406			
1 163				1 397				1 397				1 696				1 929				1 929				2 406																																	
W		<table><tr><td colspan="4">2 085</td><td colspan="4">2 085</td><td colspan="4">2 493</td><td colspan="4">2 585</td><td colspan="4">3 085</td><td colspan="4">3 585</td><td colspan="4">3 697</td></tr></table>																												2 085				2 085				2 493				2 585				3 085				3 585				3 697			
2 085				2 085				2 493				2 585				3 085				3 585				3 697																																	
H _i		<table><tr><td colspan="4">993</td><td colspan="4">1 197</td><td colspan="4">1 197</td><td colspan="4">1 496</td><td colspan="4">1 729</td><td colspan="4">1 729</td><td colspan="4">2 206</td></tr></table>																												993				1 197				1 197				1 496				1 729				1 729				2 206			
993				1 197				1 197				1 496				1 729				1 729				2 206																																	
W _i		<table><tr><td colspan="4">2 005</td><td colspan="4">2 005</td><td colspan="4">2 413</td><td colspan="4">2 505</td><td colspan="4">3 005</td><td colspan="4">3 505</td><td colspan="4">3 617</td></tr></table>																												2 005				2 005				2 413				2 505				3 005				3 505				3 617			
2 005				2 005				2 413				2 505				3 005				3 505				3 617																																	
H ₂		<table><tr><td colspan="4">2 236</td><td colspan="4">2 754</td><td colspan="4">2 754</td><td colspan="4">3 352</td><td colspan="4">3 818</td><td colspan="4">3 818</td><td colspan="4">4 772</td></tr></table>																												2 236				2 754				2 754				3 352				3 818				3 818				4 772			
2 236				2 754				2 754				3 352				3 818				3 818				4 772																																	
I		<table><tr><td colspan="4">40</td><td colspan="4">40</td><td colspan="4">40</td><td colspan="4">40</td><td colspan="4">40</td><td colspan="4">40</td><td colspan="4">40</td></tr></table>																												40				40				40				40				40				40				40			
40				40				40				40				40				40				40																																	

Selected configurations	Dimension		Length of selected configurations						
	Lt	[mm]	1 464	1 464	1 464	1 830	1 830	1 830	1 830
V									
			1 830	1 830	1 830	2 196	2 196	2 196	2 196
FV									
			2 196	2 196	2 196	2 562	2 562	2 562	2 562
FHV									
			2 196	2 196	2 196	2 562	2 562	2 562	2 562
FCV									
			2 562	2 562	2 562	2 928	2 928	2 928	2 928
FHCV									
			2 562	2 562	2 562	2 928	2 928	2 928	2 928
FGHV									
			2 196	2 196	2 196	2 562	2 562	2 562	2 562
FGV									
			2 928	2 928	2 928	3 294	3 294	3 294	3 294
FGCVH									

DIMENSIONS - MVS 150-650 - SUPPLY & EXHAUST

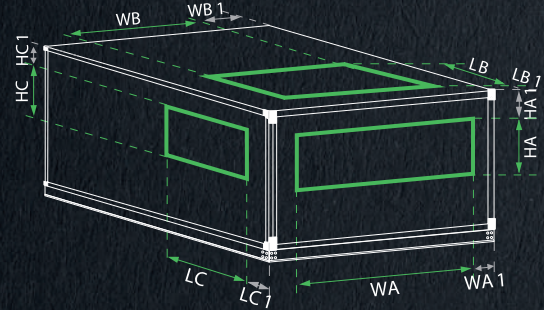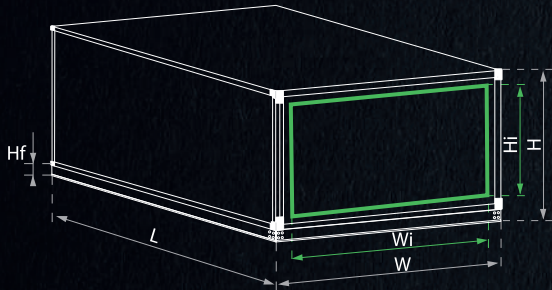

Full-face horizontal outlet
END (FF)



Size	WA	HA	WA1	HA1
MVS021	821	313	70	67,5
MVS030	821	440	70	70
MVS040	1 028	440	70	70
MVS055	1 199	575	70	70
MVS075	1 340	695	70	70
MVS100	1 520	795	70	70
MVS120	1 751	832	70	70

Small horizontal inlet-outlet
END (FS)



Size	WA	HA	WA1	HA1
MVS150	1520	795	280	137
MVS180	1520	713	280	239
MVS230	1945	813	272	200
MVS300	1945	813	318	319
MVS400	2650	813	215	436
MVS500	3150	813	215	436
MVS650	3250	813	220	674

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS150	1520	795	280	200
MVS180	1520	713	280	239
MVS230	1945	813	272	151
MVS300	1945	813	318	151
MVS400	2650	813	215	151
MVS500	3150	813	215	151
MVS650	3250	813	220	151

Vertical inlet-outlet
END (US)



Size	WB	LB	WB1	LB1
MVS150	1520	795	280	127
MVS180	1520	713	293	127
MVS230	1945	813	284	127
MVS300	1945	813	330	127
MVS400	2650	813	228	127
MVS500	3150	813	228	212
MVS650	3250	813	234	212

Side inlet-outlet
END (BS)



Size	HC	LC	HC1	LC1
MVS021	213	380	115	165
MVS030	313	380	131	165
MVS040	313	380	131	165
MVS055	413	380	149	165
MVS075	413	380	209	165
MVS100	613	380	159	165
MVS120	613	380	177	165

Side inlet-outlet
END (BS)



Size	HC	LC	HC1	LC1
MVS021	213	380	114	202
MVS030	313	380	180	202
MVS040	313	380	165	202
MVS055	413	380	137	202
MVS075	413	380	197	202
MVS100	613	380	158	127
MVS120	613	380	198	127

ADDITIONAL CONFIGURATION FUNCTIONS - MVS 021-650 - RECUPERATOR (HEX & PREMIUM PLUS), REGENERATOR (HEAT WHEEL), SUPPLY & EXHAUST

Dimension		Function version	Remaining configuration functions – typical lengths of function arrangement						
			MVS021	MVS030	MVS040	MVS055	MVS075	MVS100	MVS120
 F	L	F7/F9	762	762	762	762	762	762	762
		EU4/F5	366	366	366	366	366	366	366
 H	L	H	366	366	366	366	366	366	366
 C	L	C	366	366	366	366	366	366	366
 S	L	S	1098	1098	1098	1098	1098	1098	1098
 E	L	E(e1)	366	366	366	366	366	366	366
		E(e2)	762	762	762	762	762	762	762
		E(e3)	1098	1098	1098	1098	1098	1098	1098
 M	L	M	762	762	762	762	762	762	762
 W	L	W	1098	1098	1098	1098	1098	1098	1098

Dimension		Function version	Remaining configuration functions – typical lengths of function arrangement						
			MVS150	MVS180	MVS230	MVS300	MVS400	MVS500	MVS650
 F	L	F7/F9	762	762	762	762	762	762	762
		EU4/F5	366	366	366	366	366	366	366
 H	L	H	366	366	366	366	366	366	366
 C	L	C	366	366	366	366	366	366	366
 S	L	S	1098	1098	1098	1098	1098	1098	1098
 E	L	E(e1)	366	366	366	366	366	366	366
		E(e2)	762	762	762	762	762	762	762
		E(e3)	1098	1098	1098	1098	1098	1098	1098
 M	L	M	1098	1098	1098	1098	1098	1098	1098
 W	L	W	1098	1098	1098	1098	1098	1098	1098



COMPONENTS

DIRECT DRIVE PLUG FAN SET




Design and application

- Centrifugal fan, without casing, single inlet, PLUG type, with backward curved blades.
- Impeller made of SAN (styrene/acrylonitrile) construction material with 20% glass fiber.
- Direct drive – fan impeller installed directly on motor shaft.
- Fan section consisting of single or multiple fans (fan array) in order to ensure optimum working parameters.

Specification

- Low and medium pressure ventilation systems with fan static pressure not exceeding 2000 Pascals.
- Maximum fan set working temperature: 60°C.


> AC MOTORS

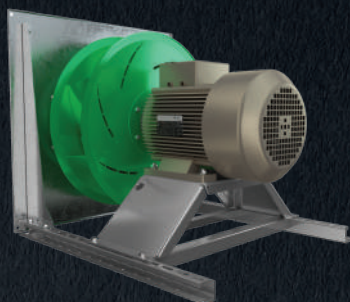

- Fan and motor mounted on common housing, separated from AHU casing by set of rubber vibration absorbing mounts.
- Motors of TEFC type (Totally Enclosed, Fan-Cooled).
- Motors fitted for IEC standard.
- Variable Frequency Drive (VFD) – standard equipment of the fan-set.

- Available Energy classes: IE2, IE3
- Rated voltage: 3x230V AC, 3x400V AC.
- Number of poles: 2 or 4.
- Motor winding insulation class: F (fitted for VFD operations).
- Bearings lifetime: L10 = 20000h / L50 = 100000h.
- Protection degree: IP55.
- Maximum working ambient temperature: 60°C.


> EC MOTORS



- Set of fan and motor mounted on common rail, fixed to the AHU fan diaphragm.
- EC motors are Permanent Magnet motor, characterised by much higher efficiency vs traditional inductive AC motors.
- EC motors (Electronically Commutated) – where mechanical commutator switching the windings has been replaced with electronic one.
- Change of revolutions is done by means of changing the frequency rate of windings switching (rate or magnetic field rotating).
- Highly inductive permanent magnets have applied in EC motors used by Mycond, which enabled to achieve high torque at relatively small dimensions, together with reaching IE4 efficiency class.

- Available Energy classes: IE4.
- Rated voltage: EC motors of nominal capacity exceeding 0,75kW – 3x400V AC.
- Rated voltage: EC motors of nominal capacity equal or less 0,75kW – 1x230V AC.
- Motor winding insulation class: F.
- Protection degree: IP54.
- Maximum working ambient temperature: 55°C.
- Lifespan:
 - 70 000 hours at load not exceeding 70% of nominal capacity at ambient temperature not exceeding 35°C,
 - 30 000 hours at 100% capacity load at ambient temperature not exceeding 55°C.

CASING



Design and application

- Casing structure made of 'sandwich' type panels formed in 'C' shape and reinforced by system of internal frames.
- "Sandwich" double skin panels made of rigid polyurethane foam.
- Indoor and outdoor application.
- Inspection panels mounted on AHU side.
- Casing supported on steel base rails.

Specification

- Working temperature: $(-40)^{\circ}\text{C} \div (+90)^{\circ}\text{C}$.
- Panel thickness: 40mm.
- Thermal conductivity PPU $\lambda = 0,022 \text{ W/mK}$.
- Casing fire resistance: non-flamable, non fire spreading (NRO).
- Moisture absorption: 0,04%.
- PPU density: $\rho = 42 \text{ kg/m}^3$.

PANEL FILTERS



Design and application

- Pleated filtration fabric shielded by steel net, installed in 50 mm thick frame.
- Filtration fabric made of polyester fibres.
- Applied as initial air filtration stage.

Specification

- Working temperature: max $(+70)^{\circ}\text{C}$, 100% RH.

Filtration classes available

- ISO Coarse 75% (ISO 16890)
- G4 (EN779).

BAG FILTERS



Design and application

- Filtration fabric made of polyester fibres.
- Bags fixed to 25 mm thick frame.
- Filters of class M5 - bags length: 300 mm, Filters of class F7 & F9 - bags length: 600 mm.
- Applied as initial, secondary or final air filtration stage.


Specification

- Working temperature: max $(+70)^{\circ}\text{C}$, 100% RH.

Filtration classes available

- ISO ePM10 50% (ISO 16890)
- M5 (EN779).
- ISO ePM2,5 65% (ISO 16890)
- F7 (EN779).
- ISO ePM1 70% (ISO 16890)
- F9 (EN779).

ROTARY HEAT WHEEL

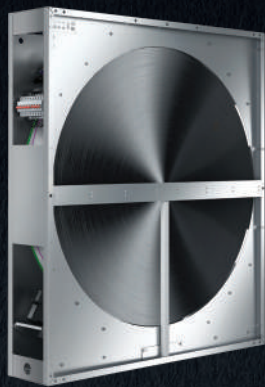


Design and application

- Rotor made of aluminum with shaft suspended on bearings, installed in steel housing.
- Rotor filling – two layers of alternately winded aluminium foil – one flat, the other – corrugated – making small ducts for the air.
- Rotor drive system with smooth revolutions control enabling to maintain highest recovery efficiency and to adjust degree of recovery performance.
- Purge zone reducing the cross-contamination effect of contaminated exhaust air to supply to absolute minimum.
- Set of gaskets installed both on the wheel outer edge and bar separating supply from exhaust air being an additional protection against cross-contamination.
- Rotary heat wheel recovers sensible heat from return air to supply, which passes the unit in opposite direction. The process enables heat recovery in winter time, same as cool recovery in summer.
- Humidity recovery from return to supply in case the rotor pad temperature is lower than dew point of return air – typically during winter season.

Specification

- Up to 86% of energy recovery, depending on airflow rate and its velocity in the heat wheel window.

COUNTERFLOW HEXAGONAL RECUPERATOR

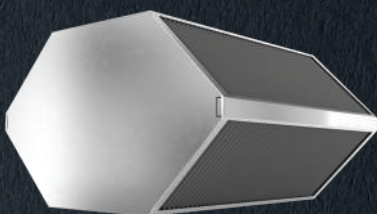


Design and application

- Hexagonal heat recovery recuperator made of crosswise stamped aluminum plates, between which supply and exhaust air passes alternately in counterflow arrangement.
- As standard, the recuperator is equipped with by-pass damper, enabling its securing against frosting and heat recovery capacity regulation.
- Optionally, the recuperator can be equipped with integrated mixing box.
- The recuperator provides sensible heat recovery for warmer air to the colder one. For winter season – recovery of heat from return air to supply. For summer – recovery of chill from return air to supply.

Specification

- Energy recovery at very high supply and exhaust air stream separation (reaching 99,9%).
- Heat recovery reaching up to 93% depending on flow rate face velocity of the air passing the recuperator.

CROSSFLOW PLATE HEAT RECUPERATOR

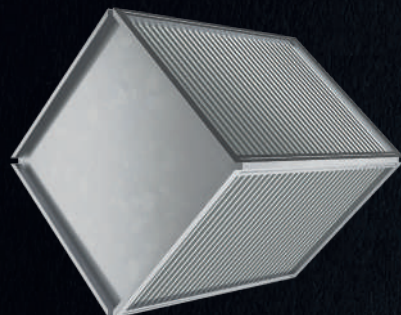


Design and application

- Recuperator made of crosswise stamped aluminum plates, between which supply and exhaust air passes alternately in counterflow arrangement.
- As standard, the recuperator is equipped with by-pass damper, enabling its securing against frosting and heat recovery capacity regulation.
- Optionally, the recuperator can be equipped with integrated mixing box.
- The recuperator provides sensible heat recovery for warmer air to the colder one. For winter season – recovery of heat from return air to supply. For summer – recovery of chill from return air to supply.

Specification

- Energy recovery at very high supply and exhaust air stream separation (reaching 99,9%)
- Heat recovery reaching up to 80% depending on flow rate face velocity of the air passing the recuperator.

RUN-AROUND COIL

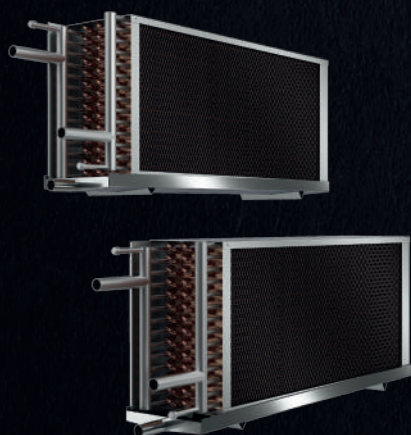

Design and application

- Set of two water coils – one in supply, the other one in exhaust airstream.
- The coil in return airstream recovers the heat (cooler) and passes it to the coil in the supply air (heater) by means of heat-transfer fluid (water-glycol mixture). In case of chill recovery, entire process is reversed.
- System applied for supply and exhaust air handling units installed remotely to each other."

Specification

- Indirect Energy recovery (sensible heat) at 100% supply and exhaust airstreams separation.
- Max heat-transfer fluid operation pressure: 1,6MPa=16bar (tested 21 bar).
- Max glycol concentration: 50%.

MIXING SECTION




Design and application

- Section equipped with two air inlets/outlets aided with dampers, enabling regulation of fresh and recirculation air share (recirculation).

Specification

- Direct Energy recovery (sensible and latent heat) resulting from partial mixing of fresh air with return one.
- Control of fresh air share in entire airflow supplied to handled spaces.
- Working temperature range: $-40 \div +70^{\circ}\text{C}$.

WATER HEATER

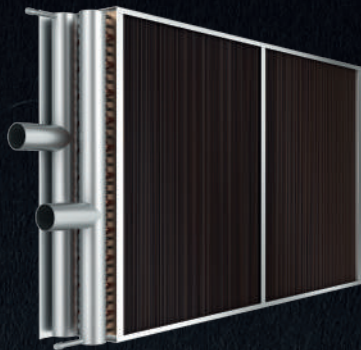


Design and application

- Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the medium supply system).
- Heating of the air supplied to the handled spaces.
- Re-heating of the air as a part of air dehumidifying process.
- The coil can be applied if heating medium is available (local boiler or district heating system).
- Coil headers are equipped with medium damping valve and air vent.
- Connecting the coil in parallel medium flow vs air, will result in its capacity reduction by over a dozen percent.

Specification

- Max glycol concentration: 50%.
- Max medium temperature: 150°C.
- Max medium working pressure: 1,6MPa = 16bar (test: 21bar).
- Heating capacity: parameter resulting from individual performance calculation of selected unit (CCOL).
- Medium side pressure drop – parameter resulting from individual performance calculation of selected unit (CCOL).

ELECTRIC HEATER

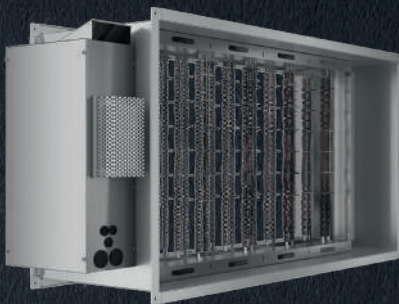


Design and application

- Set of resistive heating elements made of CR-Ni-Fe alloy, 6 kW/400V each.
- Coils mounted on hot-dip galvanized steel frame.
- Heater is equipped with power terminals and thermostat protecting against overheating.
- In case of AHU with complete controls, heater is equipped with integrated capacity control module.
- Heating capacity can be modified by means of smooth regulation module (HE module, set of Solid State Relays as optional parts of AHU controls) or by means of automatic engaging of next heating sections.

Specification

- Max permissible ambient temperature around heating elements: 65°C.

DIRECT EXPANSION COIL AS CONDENSER IN HEAT PUMP CIRCUIT

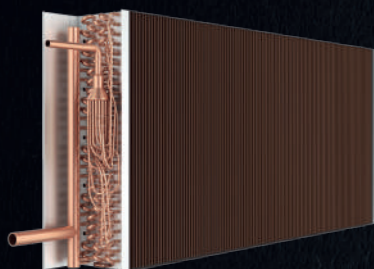


Design and application

- Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the cooling system circuit).
- Heating of the air supplied to the handled spaces.
- Re-heating of the air as a part of air dehumidifying process.

Specification

- Max medium temperature: 60°C.
- Max medium working pressure: 3,84MPa = 38,4bar (test: 50bar).
- Heating capacity: parameter resulting from individual performance calculation of selected unit (CCOL).

WATER COOLER

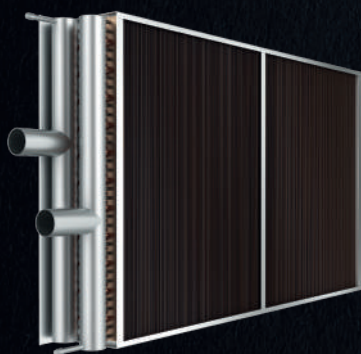


Design and application

- Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the medium supply system).
- Cooling of the air supplied to handled spaces.
- Cooling and dehumidifying of the air as a part of air complex dehumidifying process in summer season.
- Coil can be applied in complex air conditioning systems consisting of few or over a dozen of units supplied from common chilling source (chiller) or in case of single unit of relatively high cooling capacity.

Specification

- Max glyccol concentration: 50%.
- Min supplying medium temperature: +2°C.
- max medium working pressure: 1,6MPa = 16bar (test: 21bar).
- Cooling capacity: parameter resulting from individual parameters of selected unit (CCOL).
- Medium pressure drop / flow rate: parameter resulting from individual performance calculation of selected unit (CCOL).
- For reversed operation mode (heating) max medium working temperature: 140°C.

DX COOLING COIL

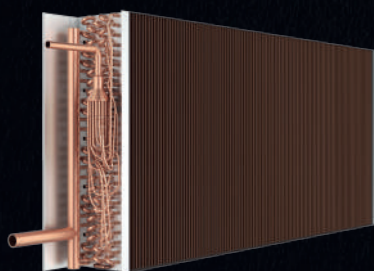


Design and application

- Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the cooling system circuit).
- DX cooler is also available as heater execution (so called Condenser).
- Cooling and dehumidifying of the air as a part of air complex dehumidifying process in summer season.
- Coil usually applied for smaller cooling capacity systems vs water coolers or for individual air conditioning systems.

Specification

- Min. Refrigerant evaporation temperature: +3°C.
- Max refrigerant working pressure: 2,2MPa=22bar (test: 29 bar).
- Cooling capacity - parameter resulting from individual performance calculation of selected unit (CCOL).

EVAPORATIVE HUMIDIFIER




Design and application

- Humidifying process based on water adiabatic evaporation from the humidifier pad.
- Humidifying pad made of CELDEK II material.
- Humidifier housing made of stainless steel.
- System of direct water dropping (MVS021-MVS055).
- System of water recirculation aided by pump (MVS075-MVS650).
- Droplet eliminator integrated with humidifier filling (MVS075-MVS650).
- System is equipped with water drainage system preventing against high water level in the pan and floating valve controlling its refilling (MVS075-MVS 650).

Specification

- Max air face velocity across the humidifier pad: 3,00 m/s (VS 21-VS 55); 4,00 m/s (VS 75-VS 650).
- Water pressure range: 0,15 ÷ 0,75 MPa.
- Requirements regarding water quality – standard tap water.

SOUND ATTENUATING SECTION

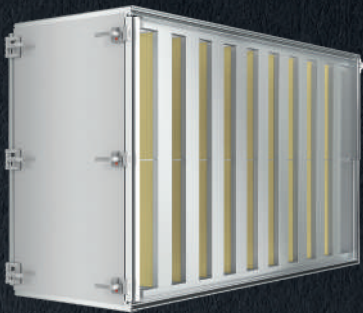

Design and application

- Sound attenuator consists of noise attenuating bars installed in the AHU casing.
- Attenuating bars of 140 mm width filled with sound-absorbing, inflammable mineral wool (density: 60 and 80 kg/m³).
- Attenuating bar housing: frame made of hot-dip galvanized steel.
- Bar outer surface: thin veil preventing against bar filling migration to the air.
- Number of attenuating bars: 2÷13, depending on block size.

Specification

- Max air face velocity: $v=5\text{m/s}$.
- Working conditions: $-40 \div +70^{\circ}\text{C}$.

INTERNAL LIGHT




Design and application

- Energy saving lamp with securing shade.
- Facilitation of AHU inspection actions: filter, fan and humidifier compartment.

Specification

- Working conditions: $-40 \div +70^{\circ}\text{C}$.

AIR DAMPER

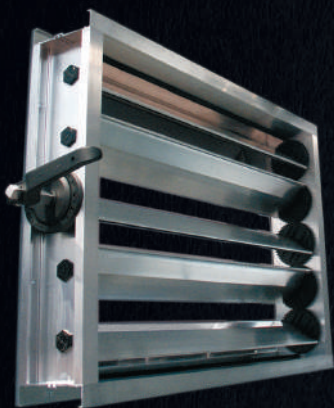

Design and application

- Blades made of aluminium with rubber gasket on the edges.
- Aluminum frame.
- Blades drive realized by means of gears made of composite material, installed on frame internal side.
- Damper is equipped with square pivot, fitted for actuator (dampers of cross section greater than 4 m² have 2 linked pivots).

Specification

- Air leakage at closed damper: 50 m³/h*m² - at 100 Pascals of pressure difference.
- Working temperature range: -40 ÷ +70°C.

FLEXIBLE CONNECTION



Design and application

- Flexible connection made of 1 mm thick and 30 mm wide hot-dip galvanized steel profiles and polyester fabric coated with PVC.
- Flame resistance: UL94 - HB [ISO 1210].
- Flexible connection resistant to UV radiation.
- Working temperature range: -30°C do +70°C.
- Max connection length (fully spread position): 110 mm.
- Flexible connection installed on each AHU/Duct joint eliminates transfer of possible AHU vibrations to the ventilation ductwork.

Specification

- Max air face velocity: 5m/s.
- Working conditions: -40 ÷ +70°C.

AIR INTAKE AND DISCHARGE LOUVERS



Design and application

- Air intake louver made of aluminum profile, blades made of ABS material.
- Air outlet louver made of aluminum profile, blades made of ABS material.
- Protection of air handling unit installed outdoor against meteorological conditions (precipitation, sand).

Specification


- Max air face velocity: 5m/s.
- Working conditions: -40 ÷ +70°C.

CONTROLS

All controls for WindMe air handling units is available as optional equipment.

Range of controls is always fitted to configuration of the AHU selected in the CCOL4 tool. Controls is capable to regulate all user parameters: air temperature, its humidity, maximum permissible CO₂ concentration and the flow rate. Also, controls support preventive and securing functions like protection of the water heater against freezing or energy recovery system against icing, protection of motors against overloading, monitoring of air filters actual status of contamination and many other. Applied algorithms can optimize performance of all air treatment components in order to minimize consumption of all energy media supplied to the unit.

The system includes control and power supply circuit.

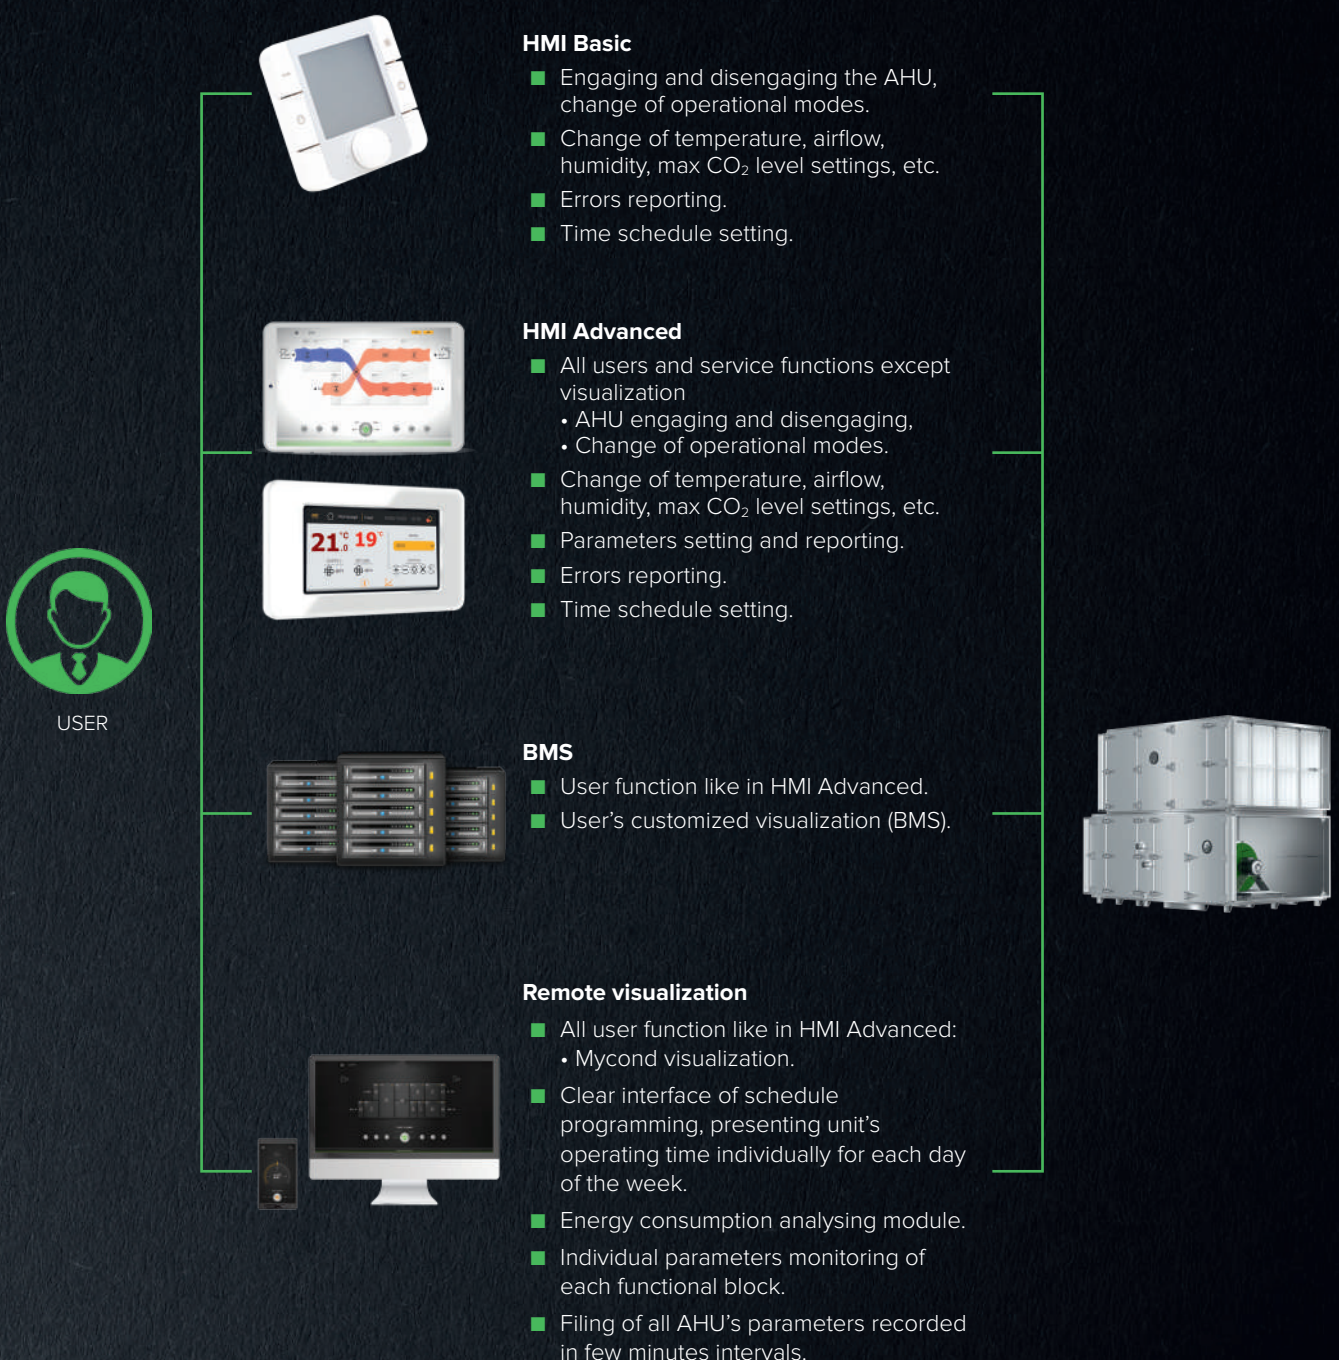

PARAMETERS REGULATION FUNCTIONS

Regulation of temperature and humidity


- Regulation of supply, return air temperature and humidity in handled spaces.
- Control of water coils valves (heater, cooler) and condensing unit.
- Control of rotary heat wheel revolutions, by-pass damper and mixing box, depending on AHU type and configuration.

Airflow rate regulation

- Constant Air Volume (CAV) available as standard.
- Constant static pressure maintenance in trunk duct (Variable Air Volume – VAV) available as option.
- Setting of constant revolutions for each fan individually – VFD setting for AC motors or constant revolutions percentage in case of EC motors.

CO₂ regulation

- By means of mixing box – for units with air recirculation.
- By means of airflow rate change – for all types of supply and exhaust units (function can be engaged together with mixing box control).

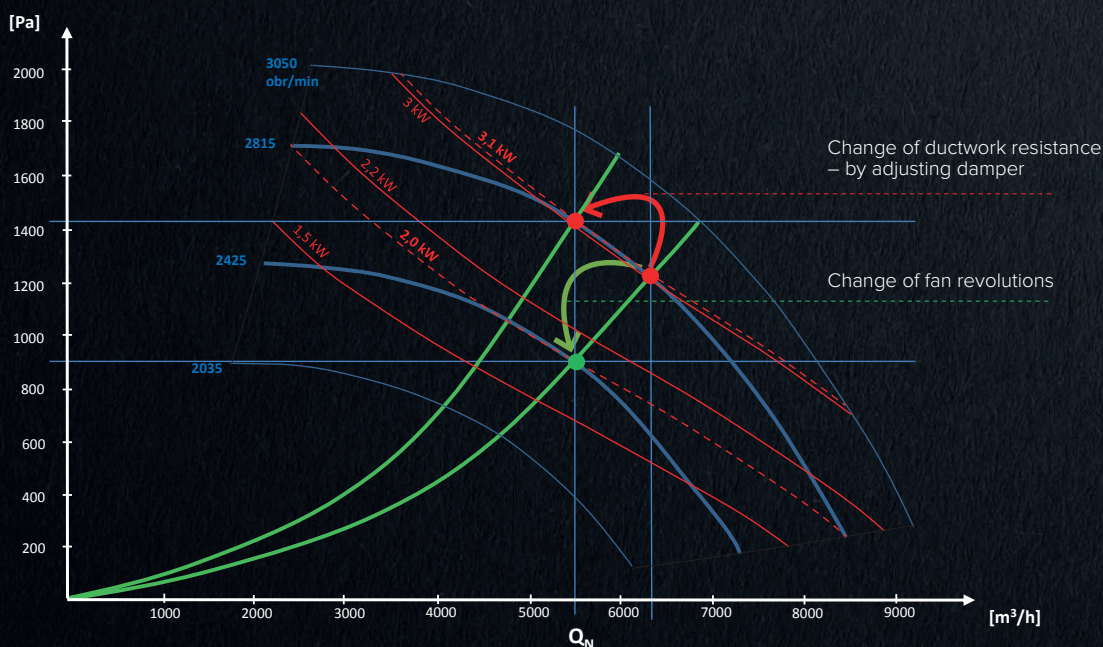

PROTECTION FUNCTIONS

- Protection against rotary heat wheel icing, by means of wheel revolutions reduction.
- Protection against hexagonal counterflow and cross-flow recuperator icing by means of by-pass damper opening. Functions realized as optional:
 - Optimizing of icing protection function by change of minimum return air temperature threshold downstream the energy recovery unit vs return air parameters.
 - Minimizing of recovery efficiency drop during defrosting
- Anti-freezing protection of water heater
 - Antifreeze thermostat installed downstream the heater
 - Strap-on return water temperature sensor
- Fans overload protection (functions realized by EC motors drives)
- Fire alarm input – AHU immediate disengaging in case of lack of external start permission from overall fire protection system.

PREVENTIVE FUNCTIONS


- Constant filter contamination status control:
 - Constant monitoring of filter pressure drop by means of static pressure transducers,
 - Evaluation of filter contamination status for vs actual airflow rate.
- Fans shutting-down delay – fan's run out for systems with electric heater
- Water heater pre-heating before fan's start up.
- Periodical heater pump engaging in summer – to prevent against limescale accumulation
- Opening of water heater regulation valve before engaging the fans.


TIME SCHEDULE FUNCTIONS

- Weekly schedule operational modes programming (HMI Advanced i Basic).
- Clear visualization of schedule settings by means of web-browser (computers and mobile devices).

POWER SUPPLY AND CONTROL CIRCUITS

- The mains component of the controls is the control box – with microprocessor controller installed inside. The control box is usually mounted on side wall of the AHU or in units direct vicinity.
- Control box is equipped with controller, power protection circuits, terminal block enabling connecting of all control elements.
- Electric protection of fans, rotary heat wheel drive, control elements and heater pump are installed inside the control box.
- Control of fan-sets (variable frequency drives in case of AC motors of specialized drives for EC ones) is realized by means of digital communication based on ModBUS protocol. Fan control elements are set with individual address enabling them to be properly identified in the control system.
- Communication with static pressure and CO₂ transducers also realized by ModBUS protocol.
- For other control elements, digital or analogue signals are used.

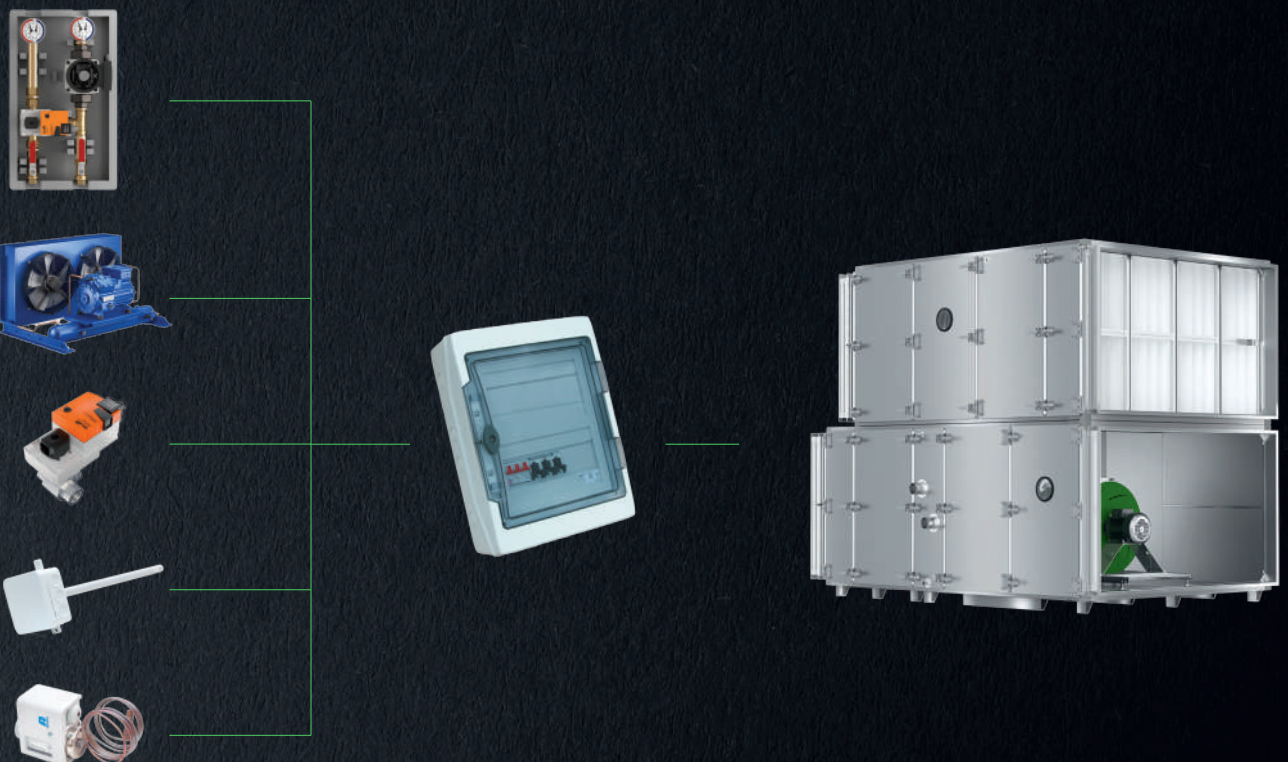

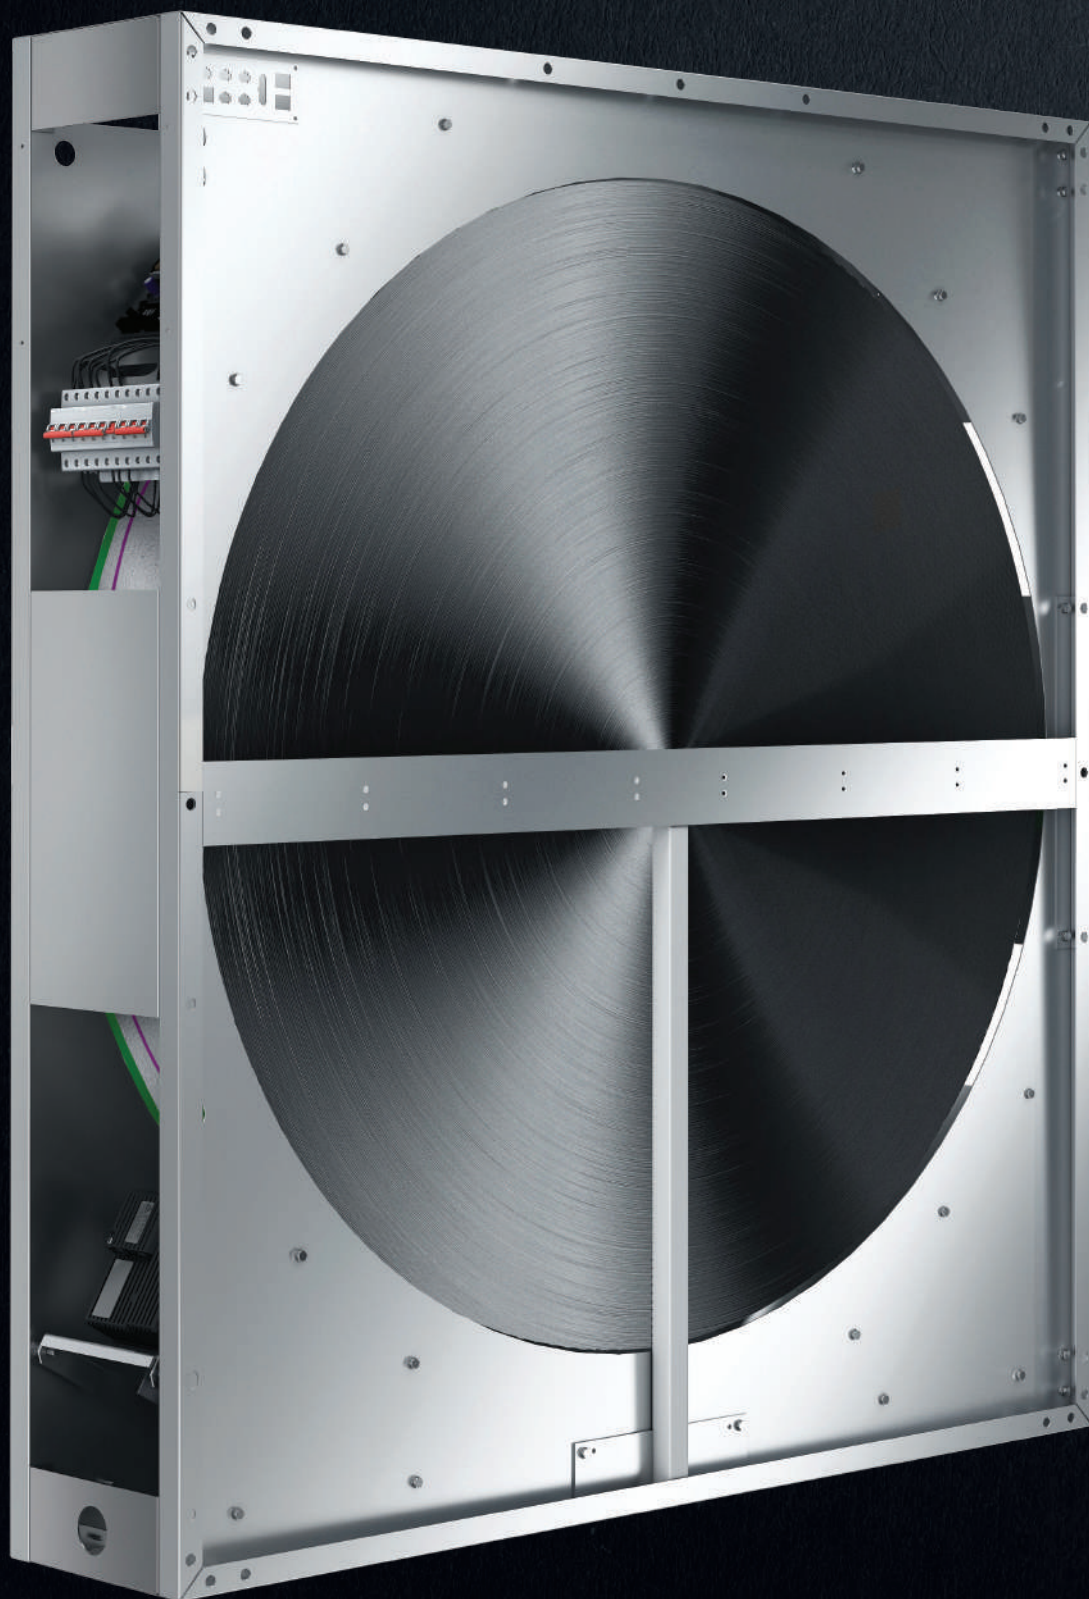

CONTROL ELEMENTS

CONTROL ELEMENTS



Functions and application

- Regulation of supply and exhaust air temperature.
- Protection of the energy recovery unit against freezing.
- Outdoor air temperature measurement in order to identify need of heat/chill recovery and engagement protecting function for water heater.

Operational parameters

- Measurement range: -50°C to +90°C.
- Measurement accuracy: $\pm 0,5K$.
- Sensor type: NTC 10k.
- Air humidity range: 5 ÷ 100%.
- Protection degree: IP67.
- Shielded cable length: max. 100 m.

ROOM AIR TEMPERATURE SENSOR



Functions and application

- Regulation of temperature in handled space.

Operational parameters

- Measurement range: -20°C do +70°C.
- Measurement accuracy: $\pm 0,5K$.
- Sensor type: NTC 10k.
- Air humidity range: 5 ÷ 95% no condensation.
- Protection degree: IP20.
- Shielded cable length: max. 100 m.

STRAP-ON MEDIUM TEMPERATURE SENSOR



Functions and application

- Protection of water heater against freezing by means of return medium temperature monitoring.

(Function supported by controller. Sensor out of Mycond offer.)

Operational parameters

- Measurement range: -20°C do +70°C.
- Measurement accuracy: $\pm 0,5K$.
- Sensor type: NTC 10k.
- Air humidity range: 5 ÷ 100%.
- Protection degree: IP67.
- Shielded cable length: max. 100 m.

ANTI-FREEZE THERMOSTAT



Functions and application

- Protection of water heater against freezing by means of air off-coil temperature monitoring (recommended temperature threshold setting: +5°C).

Operational parameters

- Measurement range: -18 ÷ +15°C.
- Hysteresis: 1,7 ÷ 12K.
- Nominal voltage: 30V DC or 230V AC.
- Output signal: potential-free contact.
- Protection degree: IP 44.

OVERHEAT PROTECTION THERMOSTAT FOR ELECTRIC HEATER



Functions and application

- Protection of electric heater against overheating.

Operational parameters

- Power cut-off temperature setpoint: 65°C.
- Power re-switch on temperature setpoint : 45°C.
- Nominal voltage: 20V DC or 230V AC.
- Output signal: potential-free contact.

DIFFERENTIAL PRESSURE SWITCH



Functions and application

- Monitoring of filter's contamination.
- Control of the operation of a direct driven fan unit in case of cooperation with electric heater.

Operational parameters

- Measurement range: 30 do 500 Pa.
- Nominal operating voltage: 250V AC (Imax=3A).
- Output signal: potential free contact.
- Working temperature range: -20°C do 60°C.
- Protection degree: IP 54.

FILTER CONTAMINATION INDICATOR



Functions and application

- Measurement of air pressure drop on filters, activated manually (button).
- Signal light (LED) informing about exceeding pressure drop thresholds.
- Low battery warning light signal.

Operational parameters

- Max. Pressure difference: 800 Pa.
- Accuracy: 2,5% of the range.
- Protection degree (interface side): IP 65.

DIFFERENTIAL PRESSURE TRANSDUCER



Functions and application

- Regulation of supply and exhaust air (CAV function).
- Regulation of static pressure in ventilation system trunk duct (VAV function).
- Constant monitoring of filter pressure drop (control of filter contamination level).

Operational parameters

- Measurement range: 6000 Pa.
- Measurement accuracy: 0,25% of the range.
- Communication: ModBus RTU.
- Supply voltage: 21,5V to 30V DC or 21,5V do 26,5V AC.
- Working temperature range: -20°C do 50°C.
- Protection degree: IP 65.

AIR HUMIDITY TRANSDUCER



Functions and application

- Regulation of supply and return air humidity in handled spaces (support for air humidifying and dehumidifying).
- Measurement of return air humidity – automatic change of anti-freeze threshold temperature setting of cross-flow recuperator depending on return air parameters*.

Operational parameters

- Measurement range: 0-100%.
- Tolerance: +/- 3%.
- Communication: ModBus RTU.
- Supply voltage: 24V DC.
- Working temperature: -40°C to 80°C.
- Protection degree: IP 65.

* Also available as integrated with air temperature sensor

CO₂ TRANSDUCER



Functions and application

- Regulation of CO₂ concentration in handled spaces (control of mixing box or airflow rate).

Operational parameters

- Measurement range: 0 do 2000 ppm.
- Tolerance:
 - between 400 and 1250 ppm: +/-3%,
 - between 1250 and 2000 ppm: +/-5%.
- Communication: ModBus RTU.
- Supply voltage: 24V DC.
- Working temperature: 0 do 50°C.
- Protection degree: IP 54.

ON/OFF DAMPER ACTUATOR




Functions and application

- Airflow opening or closing in the AHU (connectors of air intake and discharge) – for units with water heater actuators with return spring are applied.

Operational parameters

- Regulation mode: ON/OFF (two-point).
- Angle of rotation: 90°.
- Torque: 16 Nm (max damper cross-section: 4 m²).
- Full open/close time: 120 s (with spring: 10 s).
- Supply voltage: 24V AC/DC.
- Working temperature: -20°C do 50°C.
- Protection degree: IP 54.

SMOOTH CONTROL DAMPER ACTUATOR



Functions and application

- Smooth regulation of return and fresh air mixing (recirculation) – for units with water heater actuators with return spring are applied.
- Protection of cross-plate or hexagonal recuperator against frosting – smooth regulation of by-pass damper opening.

Operational parameters

- Regulation mode: 0 do 100% (smooth).
- Control signal: 0-10V.
- Angle de rotation: 90°.
- Torque: 16 Nm (max damper cross-section: 4 m²).
- Full open/close time: 90s (with spring: 10 s).
- Supply voltage: 24V AC/DC.
- Working temperature: -20°C do 50°C.
- Protection degree: IP 54.

SET FOR WATER HEATER CAPACITY REGULATION (PUMP GROUP)



Functions and application

- Smooth regulation of water heater capacity.

Operational parameters

- Regulation mode: 0 to 100% (smooth).
- Control signal: 0-10V.
- Full open/close time: 90 s.
- Valve supply voltage: 24V AC/DC.
- Pump supply voltage: 230V AC.
- Working temperature: +5°C do 50°C.
- Medium temperature range: -10°C to 120°C.
- Max glycol concentration: 50%.
- Protection degree: IP 54.

THREE-WAY VALVE FOR WATER HEATER OR COOLER



Functions and application

- Smooth regulation of water heater or cooler capacity.

Operational parameters

- Regulation mode: 0 do 100% (smooth).
- Control signal: 0-10V.
- Full open/close time: 90 s.
- Valve supply voltage: 24V AC/DC.
- Working temperature: +5°C do 50°C.
- Medium temperature range: -10°C do 120°C.
- Max glycol concentration: 50%.
- Protection degree: IP 54.

ELECTRIC HEATER CONTROL MODULE – MHE TYPE



Functions and application

- Power supply, protection and smooth regulation of electric (heating) capacity of multi-stage electric heaters by means of PWM (Pulse Width Modulation).

Operational parameters

- Regulation mode: 0 to 100% (smooth).
- Nominal voltage: 3*400V/50Hz.
- Control circuits supply voltage: 24V AC.
- Binary input signal: 3 x 24V DC.
- Binary output signal 6 x 24V DC.
- PWM 1 x 24V DC.
- Working temperature: 0°C do 50°C.

VARIABLE FREQUENCY DRIVE



Functions and application

- Smooth regulation of fan-set capacity.
- "Soft-start" of the fan without mechanical and electric shock.
- Motor protection against overloading and stucking.

Operational parameters

- Frequency regulation range: 10 ÷ 100 Hz.
- Communication: ModBus RTU RS485.
- Supply voltage:
 - single-phase 200 ÷ 240V AC,
 - three-phase 380 ÷ 480V AC.
- Working temperature: 0°C to 40°C.
- Protection degree: IP 20.

HMI BASIC USER INTERFACE



Functions and application

- Maintenance of Air handling unit – temperatures setting and reading, change of operating modes, independent time schedule management, alarm codes displaying.
- Configuration of controller's universal inputs and outputs.

Operational parameters

- Power supply directly from the controller.
- Communication with controller – RS485 serial port.
- Max length of communication cable: max. 500 m.
- Working temperature: -20°C to 60°C.
- Humidity: <85% (no condensation).
- Protection degree: IP 31.

HMI ADVANCED USER INTERFACE




Functions and application

- Maintenance of Air handling Unit – parameters setting and reading (temperature, airflow, CO₂, humidity etc), change of operational modes.
- Weekly schedule programming.
- Service maintenance – configuration of all advanced AHU operating parameters, configuration controllers universal inputs and outputs.
- Remote configuring of variable frequency drives.
- AHU alarms and errors monitoring (full text description) and cancelling.

Operational parameters

- Power supply directly from the controller
- Communication with controller – RS485 serial port
- Max length of communication cable: max. 1200 m,
- Working temperature: -20°C to 60°C.
- Humidity: <85% (no condensation).
- Protection degree: IP 20.

SUPPLY AND CONTROL BOX




Functions and application


- Control of all components and processes of Air Handling Unit, especially realization of regulation (temperature, airflow, CO₂, humidity) and protection functions (anti-freezing of energy recovery heat exchanger or water heater, fan-sets overloading etc).
- Alarms handling, self-diagnostics.
- Filling of all operating parameters history.
- Communication with user interfaces (HMI).

Operational parameters

- Supply voltage: 3x400 VAC or 1x230 V AC.
- Supply frequency: 50 Hz, +/- 1 Hz.
- Control circuits supply voltage: 24 V AC.
- Water heater pump supply voltage: 230 V AC (max.10A).
- Communication with internal controls circuits, VFD's or EC motors controller: ModBus RTU.
- ModBus communication: TCP/IP.
- Working temperature: 0 to 50°C.
- Humidity: <85% (no condensation).
- Protection degree: IP 54.

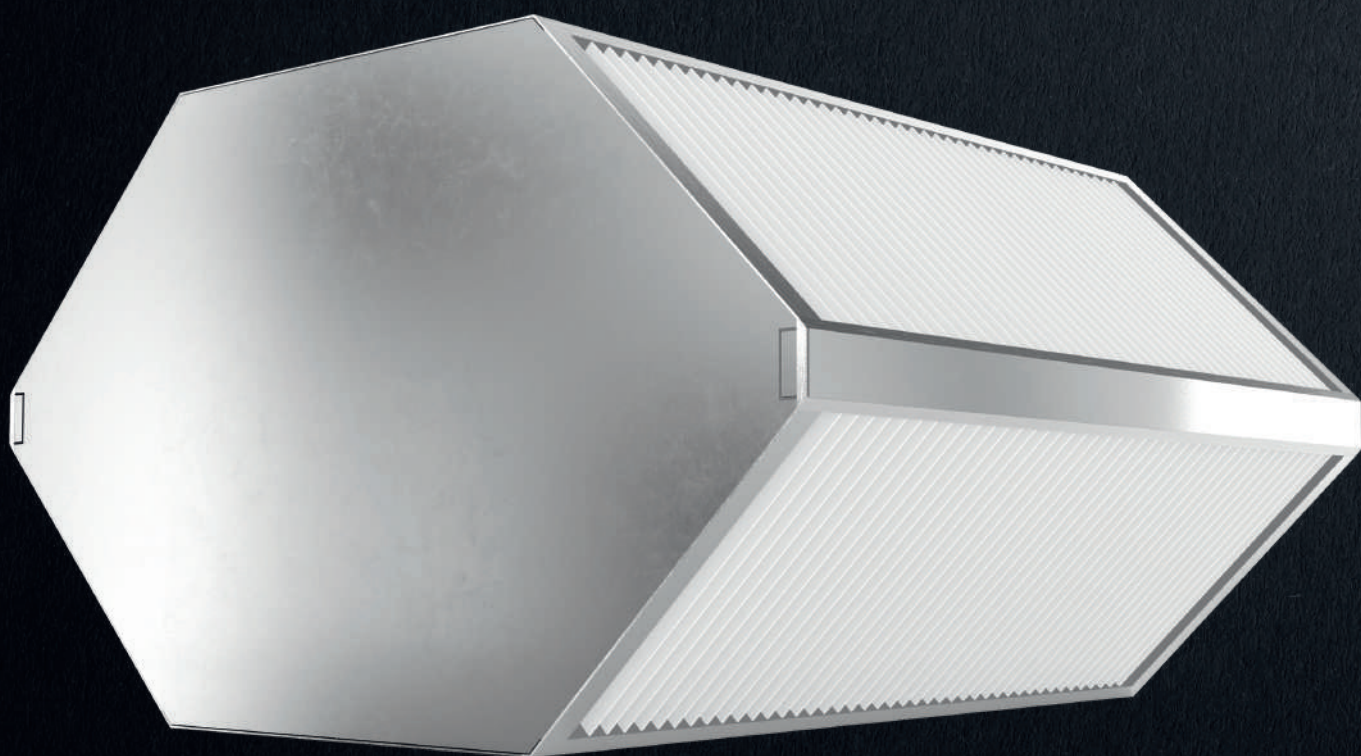

CODING

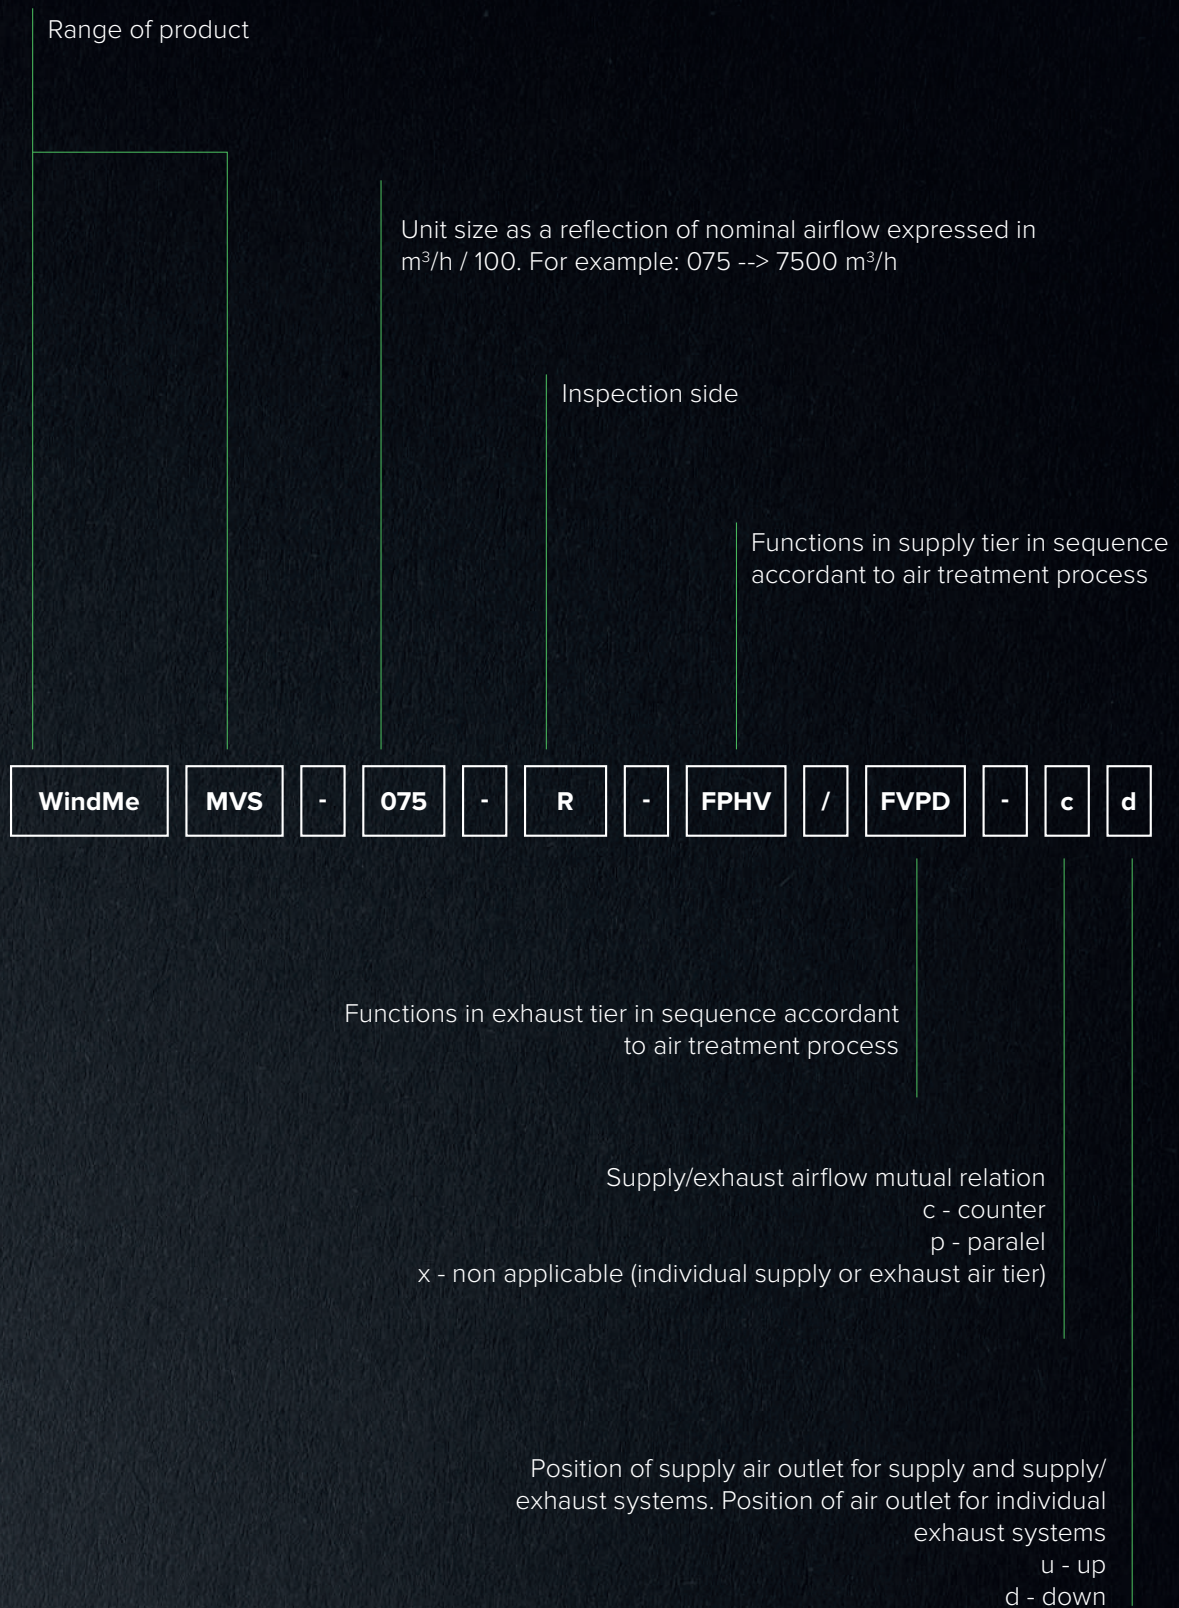

MVS075-R-FPHV/MVS075-L-FVPD_CD


CODES & SYMBOLS

CODE	SYMBOL	NAME
F		Air filter
V		Fan
C		Cooler
H		Heater
M		Mixing box
P		Plate cross-flow recuperator
R		Rotary heat wheel
G		Run-around coil
D		Droplet eliminator
W		Humidifier
E		Additional empty space
S		Sound attenuator

Auxiliary codes

- (cw) water cooler
- (dx) direct expansion cooler
- (xR) coil number of rows
- (hw) water heater
- (el) electric heater
- (sx) sound attenuator version

PSYCHROMETRIC CHART

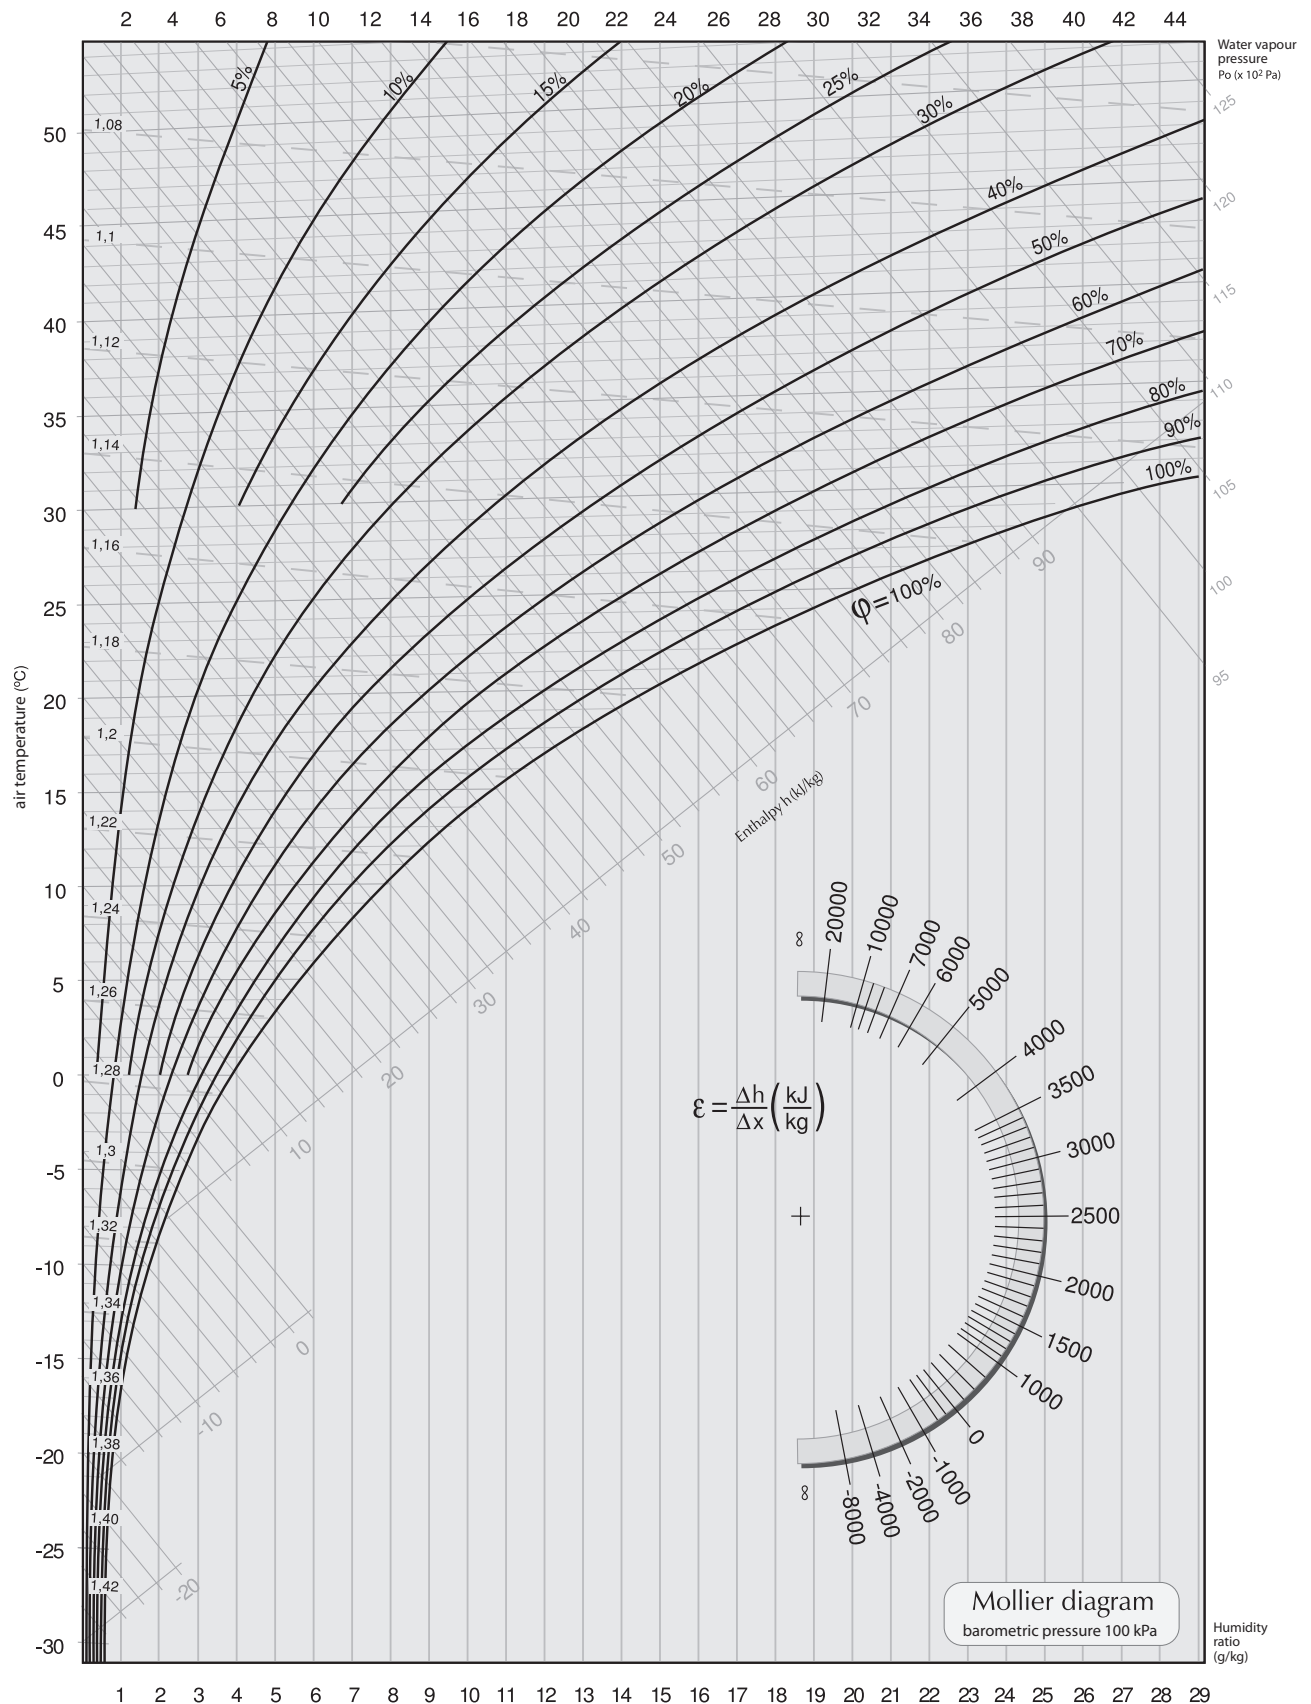

Main office

MYCOND LIMITED

Percy Street 5, Building 1, Fitzrovia District, London,
W1T 1DG, England, Great Britain
+44 745 814 8214 info@mycond.eu
mycond.eu



Exclusive distributor

AKLIMA POLSKA

+48 502 121 436
info@aklimapolska.pl
aklimapolska.pl